
Certificate of Survey

Retracement

David and Margaret Brockmann Property

SW1/4, SW1/4, S32, T37N, R26W, P.M.M. Lincoln County, Montana

Surveyed 9/2002

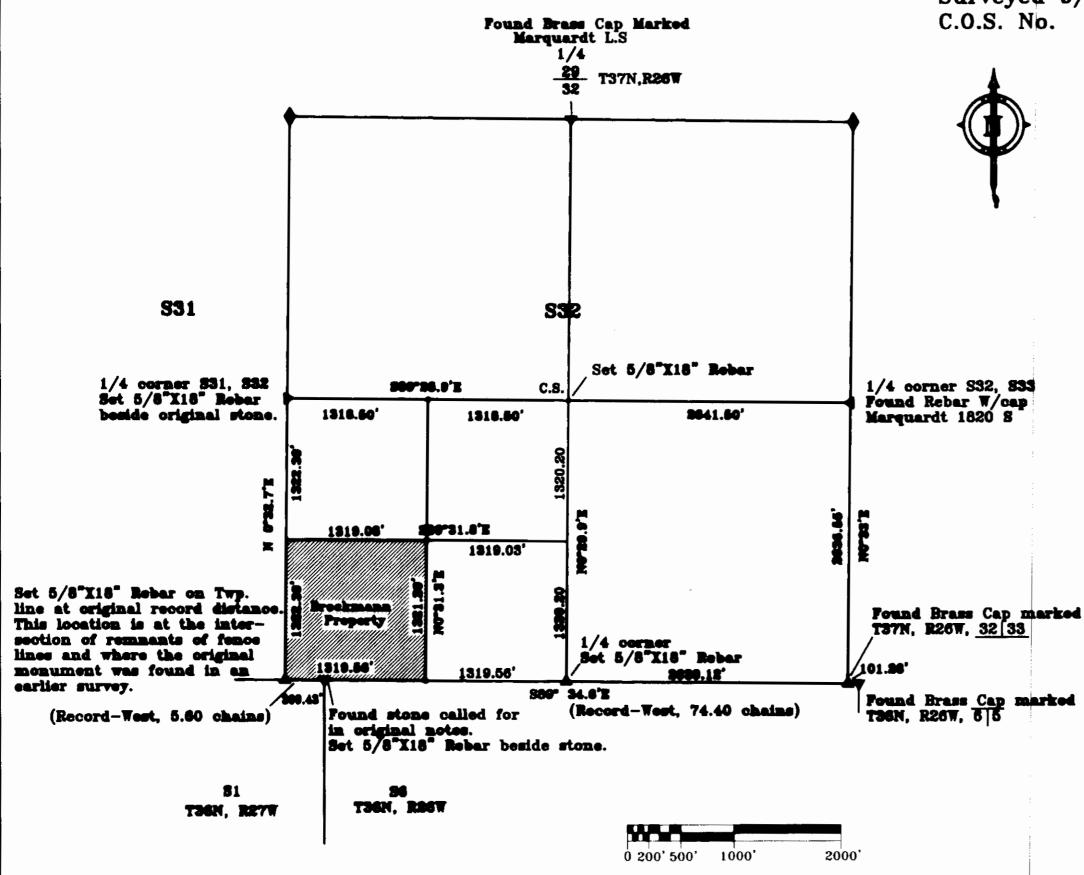

LAND SURVEYOR'S CERTIFICATION

I hereby certify that I am a Registered Land Surveyor in the State of Montana, that the survey shown on this Certificate of Survey has been prepared under my supervision and in accordance with the Montana Code Annotated, Sections 76-3-191 through 76-3-625, and the Lincoln County regulations adopted pursuant thereto.

Naufon Al Vielen

3897 5

INING LAND SURVEYOR'S CERTIFICATION

Approved this 3th day of 5507 2003, A.D.

H. WESTER A LILLY

Mathematical Land Surveyor

Filed on the 3nd day of of A.D. 2003 at/0:00 0'clockA.M.

Coxal A Camming by Treami News County Clerk and Recorder deputy



Set 5/8"x18" Rebar Indian Creek Road Shea Ranch Inc. S89°31.8'E 1319.03 Set 5/8"x18" Rebar Locations of Brockmann Brockmann Residence and fence lines are approximate. Residence Fence Lines David and Margaret Brockmann Property 40.03 Acres 31.3'E ~ 322.39 Parcel A S31 **S32** 1319.56 P.O.B. e Set 5/8'x18" Rebar S89° 34.6'E 369.43 Set 5/8"x18" Rebar-George P. Shea S1 **S6**

PURPOSE OF SURVEY/EXEMPTION

I hereby certify that the purpose of this survey is to locate the boundary of an existing tract of record and that no new or additional parcels have been created. Therefore, this survey is exempt from review as a subdivision being completed pursuant to the Montana Subdivision Act, and the Montana Sanitation in Subdivisions Act. (Section 76-3-404).

Parcel A containing 40.03 acres and which is the SW1/4, SW1/4, S32, T37N, R26W, M.P.M. and more particularly described as follows:

Beginning at the southwest corner which is the corner S31, S32, T37N, R26W, M.P.M. and S1, T36N, R27W, M.P.M. Where a 5/8"X18" Rebar was set in the ground at the original corner location; Thence, N0°32.7'E, 1322.39 feet to a 5/8"X18" Rebar set in the ground; Thence, S89°31.8'E, 1319.03 feet to a 5/8"X18" Rebar set in the ground; Thence, S0°31.3'W, 1321.29 feet to a 5/8"X18" Rebar set in the ground; Thence, N89°34.6'W, 1319.56 feet to a 5/8"X18" Rebar set in the ground at the point of beginning.

Bearings are based on the record bearing between the corner of S5, S6, T36N, R26W, M.P.M. and the corner of S32, S33, T37N, R26W, M.P.M. of the original GLO survey.

Doc 17/090

- 1 of