## **CERTIFIED CORNER RECORDATION**

					•					
Corner	C.O.E.	Sec.	20	T.	37N	R.	27W	P.M., MT	Lincoln	County
	5606/2									•

I. <u>1970 Corp. of Engineers Libby Dam Lake Koocanusa Cadastral District file No. E 53-1-154:</u> For corner no. 2 of tract 5606, set a standard U.S.C.E. disk, mkd. as shown:



- II. Found a 3 1/2 in. diam., Corps of Engineers brass cap, set flush with the ground, in concrete, mkd. as shown above. No bearing trees found.
- III. Established two bearing trees and one steel fence post:


A pine, 15 ins. diam., bears S18°W, 20.3 ft. dist., mkd. "COE 5606/2".

A pine, 8 ins. diam., bears N81°E, 14.3 ft. dist., mkd. "X" on snowblaze "BT".

A 3 ft. tall, steel fence post, bears N34°E, 2.1 ft. dist. from the corner.

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

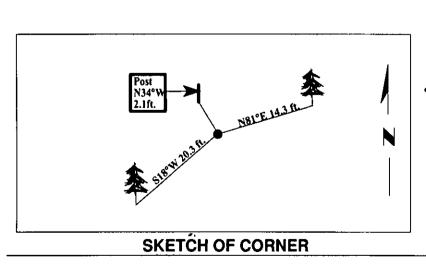


i. Ronald A. Pearson
certify the information shown herein's 101 and correct.

i. Ronald A. Pearson
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act. (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal
Date: 04/17/97

Reg. No.: 9008LS
Employer: U.S. FOREST SERVICE



Cross Index No.

C.O.E. 5602/2 37N <sup>R.</sup> 27W <sup>P.M., MT</sup>