REPLACEMENT

LINCOLN COUNTY SEPTIC SYSTEM PERMIT

ISSUED TO: Tim Lindsay PHONE: [redacted]

ADDRESS: [redacted] CONTRACTOR: _____

ISSUED BY (sign.): Ronald L Anderson RS. DATE: 5-17-90

INSPECTION BY (sign.): _____ DATE: _____

*PLEASE NOTE: The Lincoln County "On-site Sewage Disposal Regulation" does not conform with all requirements of the Montana State "Sanitation in Subdivision Act". Therefore, septic systems permitted under the county regulation may not be approvable for the purpose of future land division health reviews.

You must notify the Department of Environmental Health a minimum of 8 working hrs. before backfilling the septic system, so that it can be inspected.

LOCATION OF PROPOSED SYSTEM: Sec 32 T29 R33 (East Shore Bull Lake)


SEPTIC TANK: Existing 1000(?) gal. ABSORPTION AREA: 300 ft²


SEWAGE DISCHARGE: — gal/day No. OF BEDROOMS: 2

WATER SUPPLY SOURCE: Lake (:) SOIL: Sandy Silt w/ Mixed Gravel SLOPE: 2-4%

INSTRUCTIONS: Dig a ditch at least 150' in length x 2½-3' deep x 2' wide according to lot layout and ditch diagram. Grade of pipe should not exceed 1% drop. This system will utilize a lift station and distribution box.

SKETCH OF LOT LAYOUT:

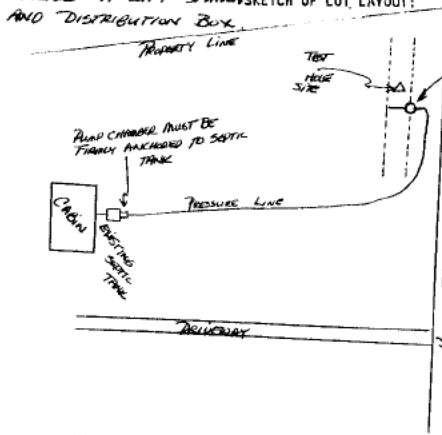



21

DITCH DIAGRAM