

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner SW Corner Section 6 T. 25N R. 28W P.M.M. Lincoln County

1. Remonumentation record B.L.M.: Found Limestone 12 X 10 X 5 inches, loosely set and marked with 1 groove on the North and 5 grooves on the South faces, and witnessed by the remains of the original bearing trees.

At the corner

Set an iron post, 30 inches long 2½ inches diameter, 27 inches in the ground, with brass cap marked.

T25N  
R29W R28W

S1	S6
S12	S7

1964

From which

The remains of the original bearing trees:

A Pine 6 inches diameter, bears N 38 3/4° E., 30 links distance marked T25N., R. 28W. S6BT. (Record N38 3/4° E 20 links.)

A Pine 6 inches diameter, bears S 42 1/8° E., 11 links distance marked T25N., R. 28W S7BT (record).

A Pine 6 inches diameter, bears S 30 3/4° W., 38 links distance marked T25N., R. 29W., S 12 BT (record)

A dead Pine, 4 inches diameter, bears N 53° W., 14 links distance, marked T25N., R. 29W S 1 BT. (record N49° W., 14 links.)

The New bearing tree:

A Pine, 6 inches diameter, bears N 64° W., 29 links distance marked T25N., R. 29W. S1 BT

Bury the original stone alongside of the iron post.

2. Found: BLM brass capped monument marked as shown above from which:

A Pine 5 inches diameter bears N 64° W 19.1 feet (record)


A Pine 6 inches diameter bears N 38° E 17.0 feet (record N 38 3/4° E 30 links)

A Pine 5 inches diameter bears S 48° E 7.0 feet (record S42½° E 11 links)

A Pine 5 inches diameter bears S 30° W 21.0 feet (record S 30 3/4° W 38 links)

Trees marked As per record and posted.

3. Painted corner monument and accessories with bright red paint.

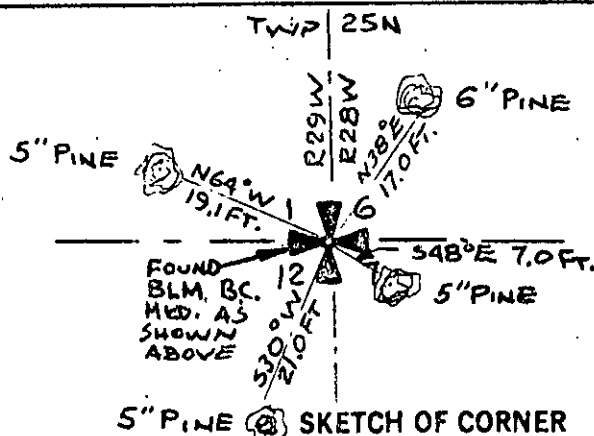

SKETCH OF CORNER

## CERTIFICATION

I, David Stanley

certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Jack H. Ninneman

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman  
Signature of Surveyor & Seal

Date: 5/24/82 Reg. No. 4661S

Employer: Ninneman Engineering Inc.


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the June 17th day of 1982 was noted on the cross-index plat and is assigned page No. 1704, in book No. \_\_\_\_\_

Eleanor L. Hughes by Betty L. Conces,  
County Official deputy

Cross Index No. E-1

T. 25N R. 28W P.M.M.

Sec. 6

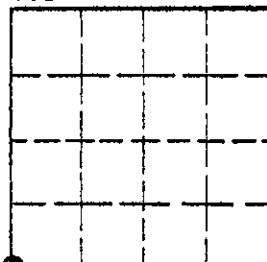

• corner this sheet