LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Permit #24-56062

Issue Date: 10/08/2024 Expiration Date: 10/07/2025

Property Owner: Julie Campbell

Mailing Address: [redacted]

Installer: Buck Schermerhorn License #: 135

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new sand lined pressure dosed system for 3 Bedroom House.

Parcel Description:

Legal: MORAINE, S12, T37 N, R27 W, LOT 3, ACRES 1.003, PM 6994

Property Address: 100 Moraine Drive North, Eureka, MT 59917 Assessment Code: 56062

DEQ COSA: EQ# 08-2392 Date: 11/19/2008

Approved Design Criteria: Installation of new sand lined pressure dosed system for 3 Bedroom House with 2 Laterals @ 48' with reduction for chambers.

# of Bedrooms: 3 Septic Tank Size: 1000/500 gallons Trench Width: 36"

# of Laterals: 2 Length of Laterals: 48' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, R.S.*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: Robin Blumberg *Date:* 11/12/24

____ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

1/5

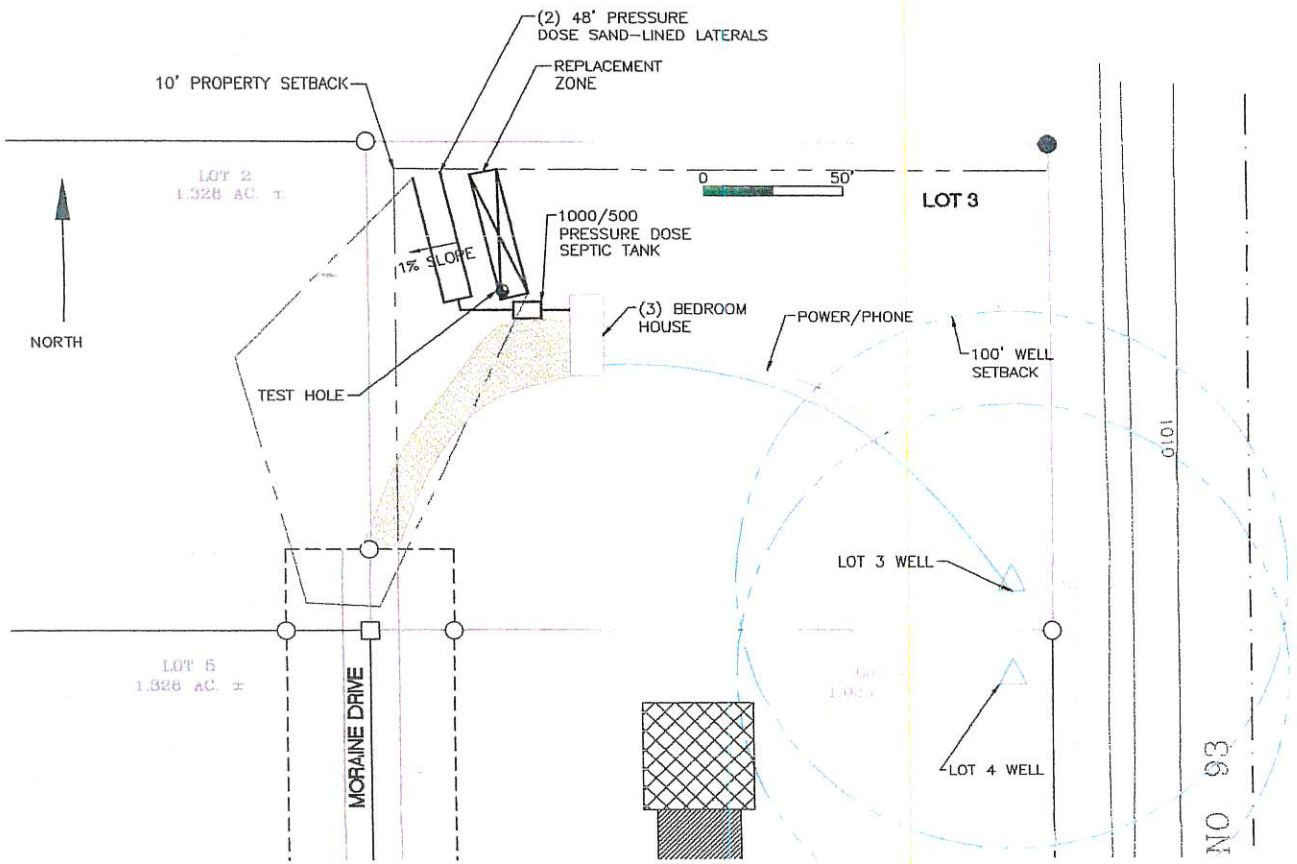

CAMPBELL SITE LAYOUT

DRAINFIELD SIZING

(3) BEDROOM= 300 GPD
300 GPD/0.8 APP= 375 SQFT
375 SQ FT/3' CHAMBERS= 125 LF
REDUCTION FOR 0.8 APP= 25%
125' X 0.75= 48 LF (2) LATERALS

LOT 3

1.003 ACRES
MORAINE DRIVE, LOT 3 MORAINE
S12, T37N, R27W, LOT 3 PM 6994
ASSESSMENT #0000056062
GEO 56-4828-12-2-01-30-0000
COSA #08-2392, DATED 11-2008

MONTANA DESIGN SERVICES
MORAINE LOT 3
SITE LAYOUT
9/12/24
9/24/24
1