INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner E. 1/4 of S18 T. 25 N., R. 28 W., P.M.M. Lincoln County

I. 1903 G.L.O. record by C. Albee et al: Set a stone and two bearing trees.

1978 BLM remonumentation : The 1/4 sec. cor. of secs. 17 and 18, determined from the remains of the original bearing trees:

A larch stump, 14 ins. diam., bears N63 3/4°E, 61 lks.(40.26 ft.) dist., with the decayed remains of a larch, lying alongside.

A larch, 14 ins. diam., bears S7°W, 134 lks.(88.44 ft.) dist., with 1/4 S18 visible.

At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.

T25N R28W
1/4
S18 | S17
1978

from which a new bearing tree:

A fir, 12 ins. diam., bears S66 1/2°E, 9 lks.(5.94 ft.) dist., mkd. 1/4 S17 BT.

II. Found a 2 1/2 ins. diam. pipe, 12 ins. out of the ground, with BLM brass cap mkd. as shown, from which

Position for larch stump in the NE falls in a skid road. (Original)

A douglas fir, 15 ins. diam., bears S65°E, 6.1 ft. dist., overgrown blaze.

A dead larch, 16 ins. diam., bears S7°W, 88.5 ft. dist., visible scribing. (Original)

III. Established one new bearing tree

A larch, 8 ins. diam., bears N7°W, 26.9 ft. dist., mkd. 1/4 S18 BT

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.
Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, North, 3 ft.
Magnetic Declination: 20° East

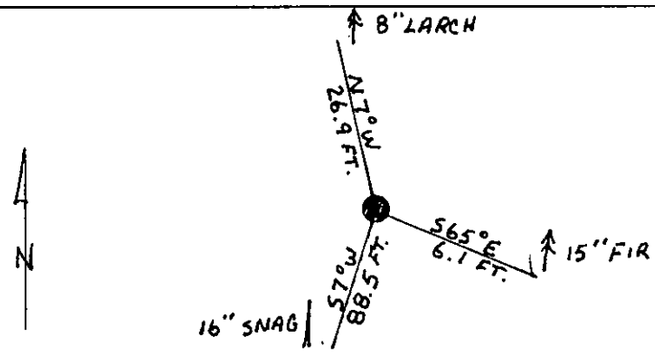

SKETCH OF CORNER

CERTIFICATION

I, Kevin A. Todd certify the information shown herein is true and correct.

Kevin A Todd
Signature Ground Party Chief

I, Alvah F. Hughes certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 1/8/91 Reg. No. 7322 LS

Employer: U.S. FOREST SERVICE

MONTANA ALVAH F. HUGHES 7322 LS REGISTERED PROFESSIONAL LAND SURVEYOR

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 1-10-91 was noted on the cross-index plat and is assigned page No. 4488, in book No. _____

Coral M Cummings by Bill Buck
County Official

Cross Index No. L-5 T. 25 N R. 28 W PMM

Sec. 18

• - corner this sheet

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors