

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner W. 1/4 of S7 T. 25 N. R. 28 W. P.M.M. Lincoln County

I. 1903 G.L.O. record by C. Albee et al: Set a stone and two bearing trees.

1964 BLM remonumentation : The 1/4 sec. cor. of secs. 7 and 12, on the E bdy. of the Tps., monumented with a limestone, 16x10x8 ins., firmly set and mkd. 1/4 on the W face, and witnessed by the remains of one of the original bearing trees.

At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.



From which the remains of the original bearing tree:

A stump, 20 ins. diam., bears N48° E, 27 lks. (17.82 ft.) dist., visible marks BT. (Record)

The new bearing trees:

A fir, 5 ins. diam., bears N35° E, 33 lks. (21.78 ft.) dist., mkd. 1/4 S7 BT.

A fir, 10 ins. diam., bears N68° W, 53 lks. (34.98 ft.) dist., mkd. 1/4 S12 BT.

Bury the original stone alongside of iron post.

II. Found a 2 1/2 ins. diam. pipe, 10 ins. out of the ground, with BLM brass cap mkd. as shown, from which

A fallen fir, 6 ins. diam., bears N36° E, 21.8 ft. dist., mkd. 1/4 S7 BT.

A stump, 20 ins. diam., bears N48° E, 17.5 ft. dist. (Original)

A douglas fir, 15 ins. diam., bears N68° W, 35.1 ft. dist.. overgrown blaze.


III. Established one new bearing tree:

A douglas fir, 12 ins. diam., bears N23° E, 37.6 ft. dist., mkd. 1/4 S7 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, South, 3 ft.

Magnetic Declination: 20° East

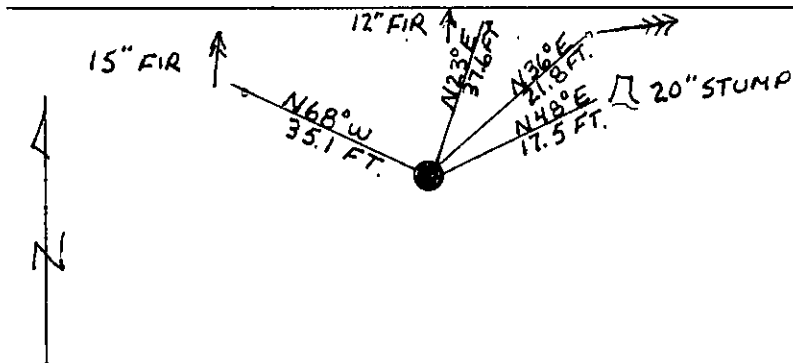

SKETCH OF CORNER

CERTIFICATION

I, Kevin A. Todd
certify the information shown herein is true and correct.

Kevin A. Todd
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor

Date: 1/8/91 Reg. No. 7322

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner


record" was filed for record on 1-10-91

was noted on the cross-index plat and is assigned page No. 4490, in

book No. Coral M Cummings by Bill Buehler

County Official

G-1 25 N 28 W
Cross Index No. T. R. PMM



• - corner this sheet