

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

CORNER: $\frac{1}{4}$ $\frac{S.16}{S.21}$, T.25N., R.28W., P.M., MT., LINCOLN CO., MONTANA

B.L.M. NOTES:

The $\frac{1}{4}$ sec. cor. of secs. 16 & 21, monumented with a sandstone, 24x8x5 ins., firmly set 18 ins. in the ground, mkd. $\frac{1}{4}$ on the N. face, and witnessed by the original bearing trees:

A 10" pine bears S.19°E., 15 lks. (9.9') dist. marked $\frac{1}{4}$ S.21 BT
 A 10" pine bears N.44°W., 27 lks. (17.8') dist. marked $\frac{1}{4}$ S.16 BT

Set an iron post, 30" long, 2 1/2" ins. diam., 22" in the ground, with brass cap mkd.: **T25N R28W**

S 16

$\frac{1}{4}$ -----

S 21

1978

bury the original stone alongside and raise a flat mound of stone, 3 ft. diam., around the iron post.

WE FIND:

A 3" BLM brass cap on iron pipe - 24" above the ground.

A 10" dead L.P. Pine bears S.18°E., 11.1 ft. mkd $\frac{1}{4}$ S21 BT
 A 10" dead L.P. Pine bears N.44°W., 17.0 ft. mkd $\frac{1}{4}$ S16 BT

TO PERPETUATE THE CORNER WE:

Brush & debris is cleared from around monument & collar Monument with stone. Six ft. steel post with **LAND SURVEY & PROPERTY BOUNDARY** decals driven along side of monument.

I establish new bearing trees as follows;


A 7" Larch bears S.07°W., 15.7 ft. marked $\frac{1}{4}$ S.21 BT

A 13" Larch bears N.29°W., 45.6 ft. marked $\frac{1}{4}$ S.16 BT

We snow blaze each tree, paint blazes and a head high band red, on each BT. **LAND SURVEY MONUMENT & BEARING TREE** signs are nailed to each tree.

Notes:

Project No. 94-3948, Border Peak

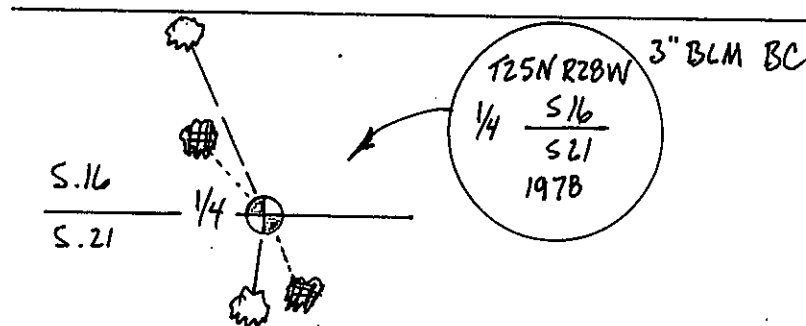

SKETCH OF CORNER

CERTIFICATION

I, Joe Bauch
 certify the information shown herein is true and correct.

Joe Bauch
 Signature Ground Party Chief

I, Steven M. Inabnit
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Steven M. Inabnit
 Signature of Surveyor & Seal

Date: 1/1996 Reg. No. 9328 LS


Employer: ELI & ASSOCIATE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 28 June day of 1996 was noted on the cross-index plat and is assigned page No. 9006, in book No.

Coral M. Cunningham
 County Official

Cross Index No. N11 T. 25N R. 28W PMM

Sec. 21

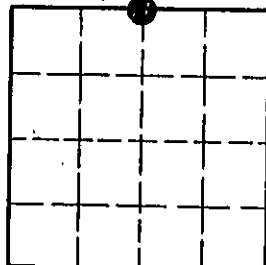

• - corner this sheet