


2. Describe corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


## CERTIFIED CORNER RECORDATION

Corner SE corner Section 2 T. 25N R. 29W P.M.M. Lincoln County

1. (A) 80 chains: Set a Limestone 18 X 12 X 6 inches, 14 inches in the ground, for corner of Section 1, 2, 11 and 12, marked with 5 notches on S. and 1 notch on E. edge: from which a Pine 8 inches diameter bears N 64°30'E 57 links distance, marked T25N., R. 29W S 1 B.T. A Pine, 13 inches diameter, bears S 82°30'E 31 links distance, marked T25N., R. 29W. S 12 B.T. A Pine, 12 inches diameter bears S 15°30'W., 13 links distance, marked T25N., R. 29W. S 11 B.T. An Alder, 6 inches diameter, bears N 49°30'W 110 links distance, marked T25N., R. 29W S 2 B.T. from this corner. David Millers house bears S 49°55'E.
1. (B) 78.90 chains: (resurvey) set a Limestone 14 X 12 X 8 inches, 9 inches in the ground for corner of Sections 2 and 11, marked with 5 notches on the S. and 1 notch on the East edges, from which a Pine, 30 inches in diameter, bears S52½°W 100 links distance, marked T25N., R. 29W. S 11 B.T. A Pine 30 inches in diameter, bears N. 83½°W 68 links distance, marked T25N., R. 29W S 2 B.T.
2. Found: BLM brass capped monument (marked as shown) from which a Pine stump, 30 inches diameter, bears S 52½°W 100 links distance, marked T25N., R. 29W S 11 B.T. A Pine stump, 30 inches diameter, bears N 83½°W., 68 links distance marked T25N., R. 29W S 2 B.T. A 12" Pine bears S52½°W., 79.9 feet scribed T25N., R. 29W. S 11 B.T. A 14" Pine bears N 66°W., 45.5 feet scribed T25N., R. 29W S 2 B.T. A location poster bears S 63°W 52.8 feet All B.T.s posted.
3. Painted monument and accessories with bright red paint.



Found B.M brass capped monument marked as shown.

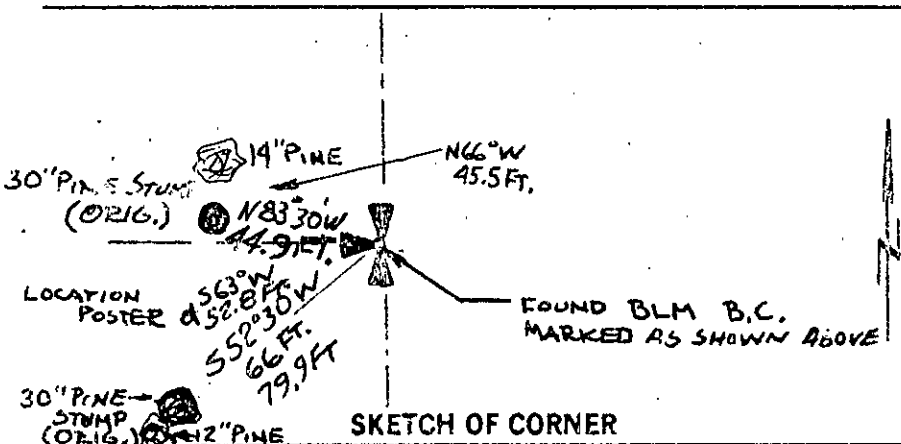

CERTIFICATION

I, Jack H. Ninneman certify the information shown herein is true and correct.

*Jack H. Ninneman*  
Signature Ground Party Chief

I, Jack H. Ninneman certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

*Jack H. Ninneman*  
Signature of Surveyor & Seal

Date: 9/4/81 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the December 7<sup>th</sup> day of 1981 was noted on the cross-index plat and is assigned page No. 1413, in book No. 1

*Cleanor L. Vaughn by Betty L. Conces*  
County Official Deputy

Cross Index No. E-21 T. 25N R. 29W P.M.M.

Sec. 2


• corner this s...