


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner C-N-N-S 1/256 Sec. 2 T25N R. 29W P.M.M. Lincoln County

1. This corner not previously set.
2. Set: a 3" X 30" aluminum capped monument marked as shown below from which,
 An 11" Fir bears N 63°E 14.7 feet scribed C-N-N-S 1/256 B.T. and posted.
 A 9" Fir bears S 79°E 14.4 feet scribed C-N-N-S 1/256 B.T. and posted.
 A location poster on a 14" Fir bears N 22°E 5.1 feet.
 Painted monument and accessories with bright red paint.

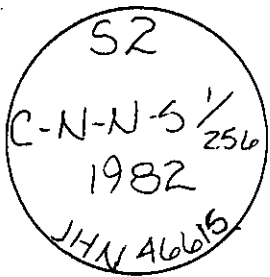

Set 3" aluminum monument marked as shown.

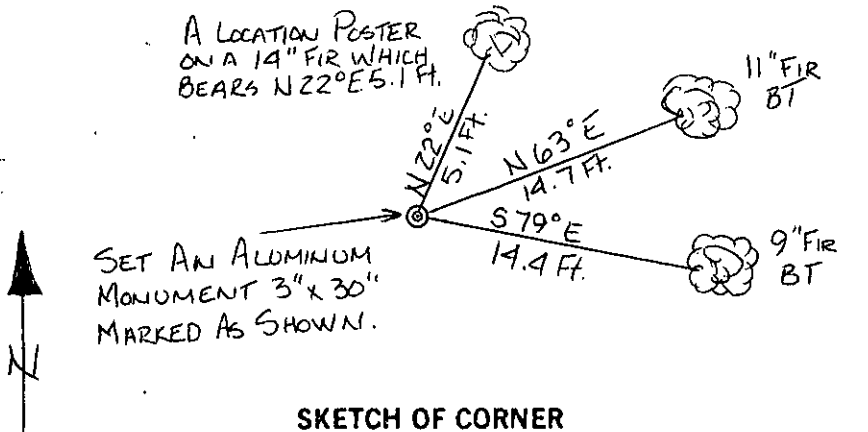

CERTIFICATION
 David Stanley
 I, _____
 certify the information shown herein is true and correct.

 Signature Ground Party Chief
 Jack H. Ninneman
 I, _____
 certify that this Corner Record correctly represents work performed
 by me or under by direction in compliance with the "Corner
 Recordation Act" (70-22-101, et seq., M.D.A.)
Jack H. Ninneman
 Signature of Surveyor & Seal
 Date: Aug '82 Reg. No. 46615
 Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner
 record" was filed for record on the Sept. 10 day of 1982,
 was noted on the cross-index plat and is assigned page No. 1896, in
 book No. _____ Eleanor L. Vaughn by Betty L. Conces
 County Official deputy

