

INSTRUCTIONS

1. Original and or subsequent record used to evaluate the corner position
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner W 1/4 Cor. Sec. 13 T. 25N R. 29W P.M.M. Lincoln County
Record


Set a limestone, 14x10x6 ins., 10 ins. in the ground, for 1/4 sec. cor., marked 1/4 on west face from which:

A 16" tamarack bears N. 68° 45' E. 201 Ks. marked "1/4 S13 BT"
BT in Section 14 was obliterated during resurvey.

Found original stone with '1/4' on west face & original BT with scribing visible.

Set aluminum monument at the stone's location - bury the stone alongside

See C. of S. No. 1088 for adjacent corners

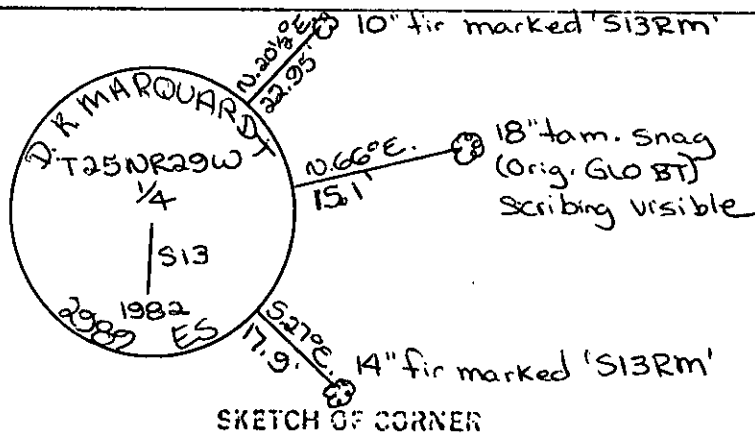

SKETCH OF CORNER

CERTIFICATION

I certify the information shown herein is true and correct.

Signature of and Party of: Dawn M. Alister

I certify that this corner file correctly represents my work performed by me or under my direction in compliance with the Survey Regulation Act (70-22-101, et seq. M.C.A.)


Signature of Surveyor & Seal: Dawn M. Alister

Date: 1/9/82 Reg. No. 73285

Employer: Marquardt Surveying

Office of Clerk and Recorder, County of LINCOLN This "corner record" was filed for record on the January 5 day of 1983 was noted on the cross-index plat and is assigned page No. 2141 in book's No. _____

Janet B.F. Siegel, By Betty L. Conces
County Official deputy



Cross Index No. L-21 T. 25N R. 29W P.M.M.

• - corner this sheet