

**INSTRUCTIONS**


1. Original and or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner Sec. Cor., Sections 13 & 24 T. 25N R. 29W P.M.M. Lincoln County  
Sections 18 & 19 T. 25N R. 28W

Found GLO brass cap

See C. of S. No. 1088 for adjacent corners.

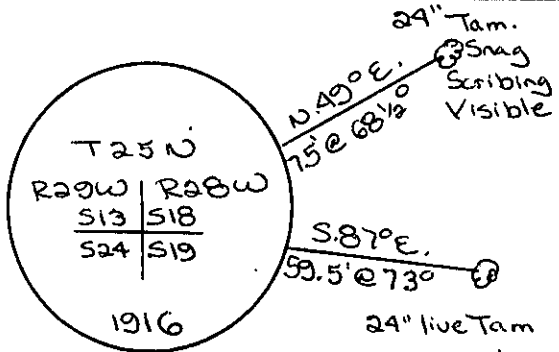

SKETCH OF CORNER

**CERTIFICATION**

I, \_\_\_\_\_ certify the information shown herein is true and correct.

Signature Ground Party Ch. 1

Dawn McAlister  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Dawn McAlister  
 Signature of Surveyor & Seal


Date 11/9/89 Reg. No. 73285

Employer Marquardt Surveying

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 5 day of 1983 was noted on the cross-index plat and is assigned page No. 2146 in book No. \_\_\_\_\_

Gret S.F. Siegel by Betty L. Conces  
 County Official deputy

Cross Index No. N-25 T. 25N R. 29W P.M.M.  
N-1 T. 25N R. 28W



• corner this sheet