

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner NW Sec. Cor. of S13 T. 25 N., R. 29 W., Lincoln County  
I. 1916 G.L.O. record by S. Walters et al: Set a stone and two bearing trees.

1978 BLM remonumentation: The cor. of sec. 12 and 13 only, monumented with a limestone, 12x10x6 ins., firmly set 8 ins. in the ground, mkd. with 1 notch on the E and 4 notches on the S edges, and witnessed by the remains of the original bearing trees:


A fir stump, 14 ins. diam., bears N16 1/2° E, 61 lks. (40.26 ft.) dist., with illegible scribe mks. visible on burned blaze.

A larch, 48 ins. diam., bears S78° E, 42 lks. (27.72 ft.) dist., mkd. T25N R29W S13 BT.

A bearing tree of unknown origin:

A fir, 14 ins. diam., bears N35° E, 103 lks. (67.98 ft.) dist., with R29E S13 visible on partially overgrown blaze.

At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.



from which a new bearing tree:

A fir, 10 ins. diam., bears N37 1/2° E, 44 lks. (29.04 ft.) dist., mkd. T25N R29W S12 BT.

Bury the original stone alongside and raise a flat mound of stone, 2 1/2 ft. diam. around the iron post.

II. Found a 2 1/2 ins. diam. pipe, 12 ins. out of the ground, with BLM brass cap mkd. as shown, from which

A stump hole bears N16° E, 40.0 ft. (Original)

A douglas fir, 12 ins. diam., bears N39° E, 28.8 ft. dist., overgrown blaze.

A larch, 48 ins. diam., bears S78° E, 30.5 ft. dist., visible scribing. (Original)

Two tress of unknown origin:


A douglas fir, 19 ins. diam., bears N35° E, 67.7 ft. dist., with faint illegible scribing.

A douglas fir, 20 ins. diam., bears N42° W, 53.0 ft. dist., with faint illegible scribing.

III. Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, East, 3 ft.

Magnetic Declination: 20° East

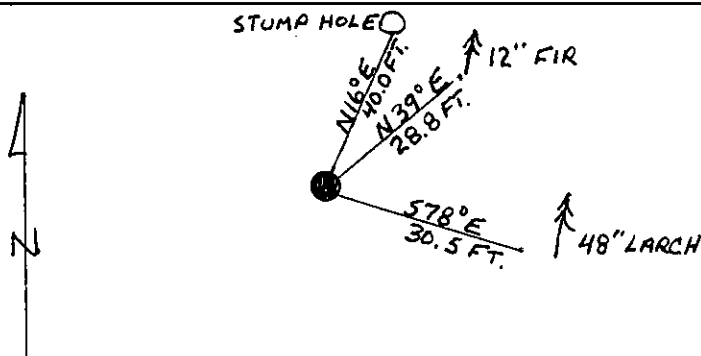

SKETCH OF CORNER

## CERTIFICATION

I, Kevin A. Todd

certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Alvah F. Hughes

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor

Date: 1/8/91

Reg. No. 7322

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on 1-10-91

was noted on the cross-index plat and is assigned page No. 4482, in

book No. \_\_\_\_\_

Coral M. Cummings by Bill Buckoff  
County Official


J-21

25 N

29 W

Cross Index No. \_\_\_\_\_ T. \_\_\_\_\_ R. \_\_\_\_\_ PMM

Sec. 13



• - corner this sheet