

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner W. 1/4 of S24 T. 25 N. R. 29 W. P.M.M. Lincoln County

- I. 1916 G.L.O. record by S. Walters et al: Set a slatestone, 12x10x10 ins., 8 ins. in the ground, for 1/4 sec. cor., mkd. 1/4 on the W face, from which
- A pine, 6 ins. in diam., bears S62 1/4° E, 9 lks. (5.94 ft.) dist., mkd. 1/4 S24 BT.
 - A fir, 8 ins. in diam., bears N57° W, 25 lks. (16.50 ft.) dist., mkd. 1/4 S23 BT.
- II. Found an 8x10 ins. stone, firmly set, protruding 4 ins. out of the ground, with 1/4 on W face.
- From which:
- A white pine, 12 ins. diam., bears S62° E, 6.1 ft. dist., overgrown blaze.
 - A douglas fir, 20 ins. diam., bears N57° W, 15.6 ft. dist., overgrown blaze.
- III. Set a 2 1/2 ins. diam. by 30 ins. long aluminum pipe, 24 ins. in the ground, with aluminum cap mkd. as shown


T25N R29W
1/4
S23 | S24
7322LS
1990

Bury original stone alongside monument.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, South, 3 ft.

Magnetic Declination: 20° East

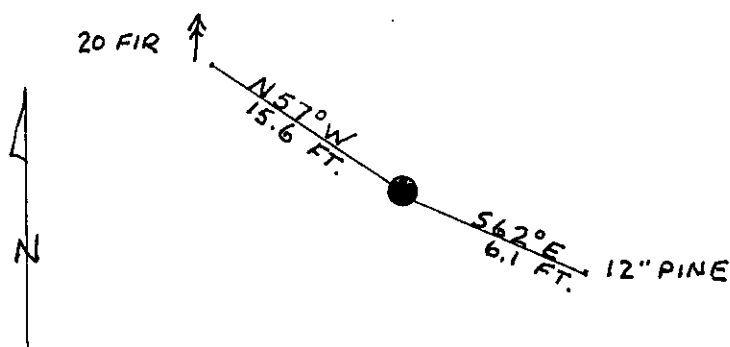

SKETCH OF CORNER

CERTIFICATION

I, Kevin A. Todd
certify the information shown herein is true and correct.

Kevin A. Todd
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 1/8/91 Reg. No. 7322LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 1-10-91 was noted on the cross-index plat and is assigned page No. 4491, in book No. Coral M Cummings by Bill Buckhoff


County Official

P-21

25 N

29 W

Cross Index No. _____ T. _____ R. _____ PMM



• - corner this sheet