LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Permit #24-59773

Issue Date: 08/19/2024 Expiration Date: 08/18/2025

Property Owner: Justin Sanders

Mailing Address: [redacted]

Installer: Bubba Excavating License #: 197

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system for 3 Bedroom House.

Parcel Description:

Legal: S09, T36 N, R26 W, COS 4475, PARCEL A, ACRES 1.24

Property Address: 620 Sinclair Ln., Eureka, MT 59917 Assessment Code: 59773

DEQ COSA: EQ# 17-1516 Date: 04/19/17

Approved Design Criteria: Installation of new pressure dosed system for 3 Bedroom House with 3 Laterals @ 76' with reduction for chambers.

# of Bedrooms: 3 Septic Tank Size: 1000/500 gallons Trench Width: 36"

# of Laterals: 3 Length of Laterals: 76' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, R.S.

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: Robin Blumberg *Date:* 11/8/24

✓ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


SV

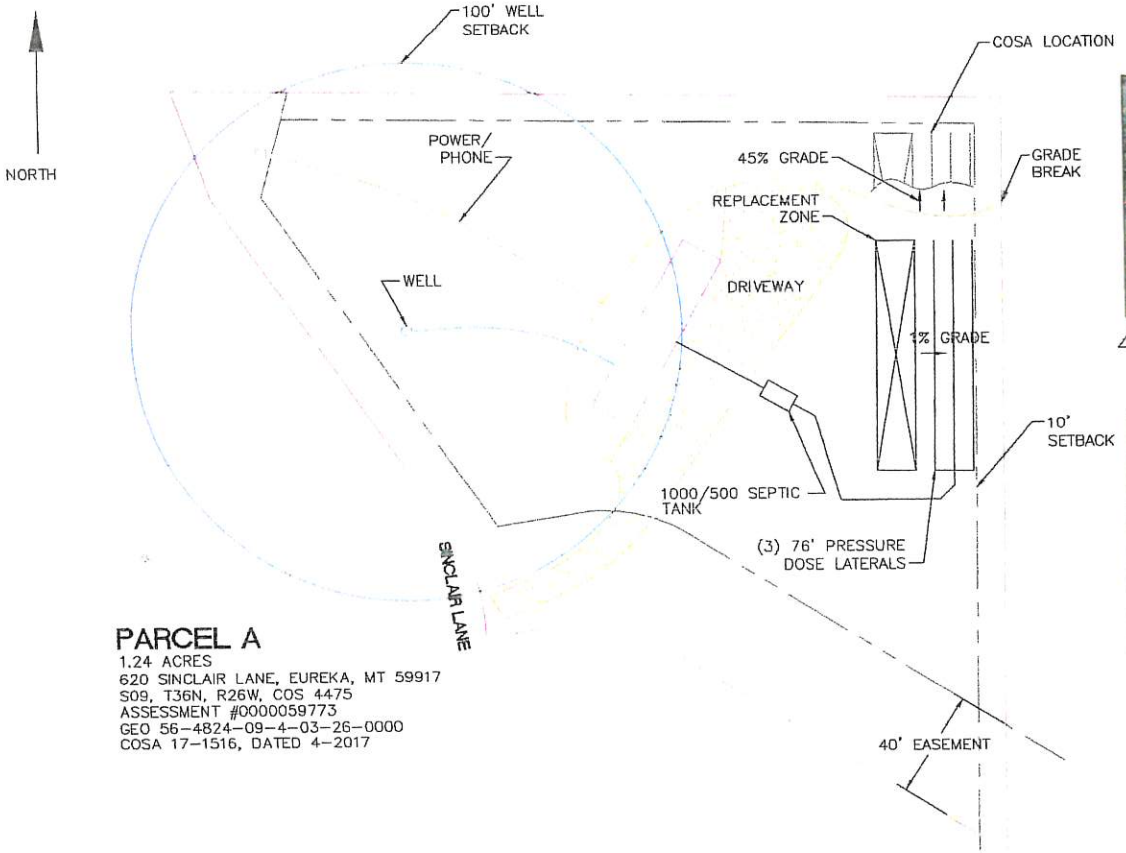

PARCEL A


1.24 ACRES
620 SINCLAIR LANE, EUREKA, MT 59917
S09, T36N, R26W, COS 4475
ASSESSMENT #0000059773
GEO 56-4824-09-4-03-26-0000
COSA 17-1516, DATED 4-2017

JUSTIN SANDERS SITE LAYOUT



DRAINFIELD SIZING

(3) BEDROOM= 300 GPD
300 GPD/0.4 APP= 750 SQFT
750 SQ FT/3' CHAMBERS= 250 LF
REDUCTION FOR 0.4 APP= 10%
250' X 0.90= (3)-76' LATERALS

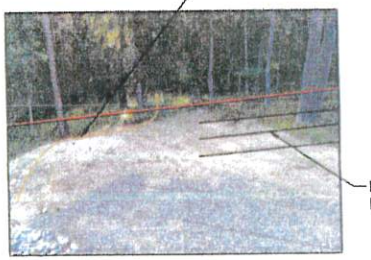



REV	DATE	COMPANY	SCALE	BUBBA'S EXCAVATION SANDERS SEPTIC
		MDS	1/16 As noted	SITE LAYOUT
		CONTRACT	DATE	8/5/24
		VERIFY	7/2024	8/5/24
		PLOT FILE	WEIGHT	347-001
		PML-0001		1

THIS DRAWING IS PROPERTY OF MDS, LTD. CONTRACT ... IT CAN NOT BE TRANSFERED TO ANY OTHER PARTIES WITHOUT WRITTEN APPROVAL FROM MDS ENGINEERING