

CERTIFIED CORNER RECORDATION

Corner SE COR. 10/11 ^{3/2} T. 25 N., R. 29 W., P.M.M. Lincoln County

Record :

1916 GLO record by S.F. Walters, C. Dyson, D. MacRae:

"Set a shalestone, 12x10x6 ins. 8 ins. in the ground, for cor. of Secs. 2, 3, 10 and 11, marked with 2 notches on the E. and 5 notches on the S. edges, from which:
 A Fir, 24 ins. in diam. bears N 33 1/2° E, 182 lks. dist. marked T25N R29W S2 BT.
 A Pine, 5 ins. in diam. bears S 17 1/2° E, 58 lks. dist. marked T25N R29W S11 BT.
 A Pine, 5 ins. in diam. bears S 26 1/2° W, 66 lks. dist. marked T25N R29W S10 BT.
 A Fir, 18 ins. in diam. bears N 21 1/2° W, 47 lks. dist. marked T25N R29W S3 BT.

1978 BLM Remonumentation by L.A. Christiansen

"Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap, from which new Bearing Trees:
 A Fir 12 ins. diam. bears S 50° E, 46 lks. dist., marked T25N R29W S11 BT.
 A Fir 8 ins. diam. bears S 46° W, 42 lks. dist., marked T25N R29W S10 BT.

Bury the original stone alongside and raise a flat mound of stone, 3 ft. diam. around the iron post."

1981 Corner Recordation (Book 1 Page 1412) by Ninneman Engineering Inc.

Found Evidence :

A 2 1/2 inch diam. steel pipe with a 3 1/4 inch diam. brass cap 4 ins. exposed above the ground marked as shown below, with a collar of stone, from which:
 A Grand Fir, 30 1/2 ins. diam. bears N 21 1/2° W, 31.00 feet dist. with overgrown blaze.
 A Grand Fir, 12 1/2 ins. diam. bears S 46° W, 27.70 feet dist. with visible scribing.
 A Douglas Fir, 12 1/4 ins. diam. bears S 50° E, 30.36 feet dist. with visible scribing.

Perpetuation :

We established one new Bearing Tree described as follows:
 A Larch, 16 ins. diam. bears N 4°30' E, 39.30 feet dist., scribed (T25N R29W S2 BT).


Painted scribed faces red and 6 inch wide red bands around all Bearing Trees.

Attached Bearing Tree signs and Land Survey Monument signs to all Bearing Trees.

Set a steel post with attached Property and Land Survey Monument stickers, west 2 feet.

T25N R29W
^{3/2}
 10/11
 1978

Magnetic Declination: 18° East

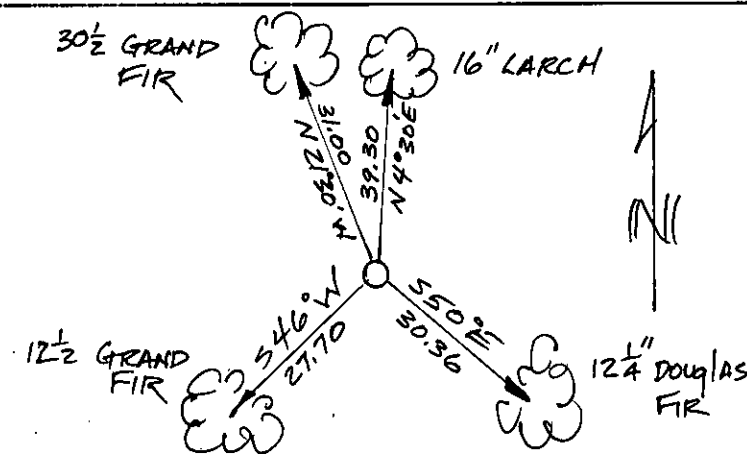

Sketch of Corner

CERTIFICATION

I, John Damon

certify the information shown herein is true and correct

John Damon
 Signature of Ground Party Chief


I, Ken E. Davis

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E. Davis
 Signature of Surveyor & Seal


Date: 12/5/97 Reg. No. 4978 S

Employer: Davis Surveying, Inc.



Office of Clerk and Recorder, County of Lincoln
 This "corner record" was filed for record on 12-26-97
 was noted on the cross-index plat and is assigned page No. 9991
 in book No. _____
Coral M. Cummins
 County Official

Section



Cross Index No. SE COR 10/11 ^{3/2} T. 25 N., R. 29 W., PMM • THIS CORNER