

INSTRUCTIONS

Q:CO-STD/152
Created 4/8/92

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner No. 4 Sentinel MS 6191 T. 25 N. R. 30 W. P.M.M. LINCOLN County

RECORD:

MS No. 6191 Sentinel, Robert C. Williams, U.S. Deputy Mineral Surveyor, 1901

1500 S.E. location corner, A point in the 1st course of Sur. No. 6187. Set a post, 4 1/2 ins. square, 5 ft. long, 2 ft. deep, marked 4-6191, for Cor. No. 4, and raised a mound of earth and stone around post.

Cor. No. 2 of Sur. No. 6187 bears S.26°26'W., 155.5 ft.

FOUND:

Found no remaining evidence of post or the mound of stone.

TO PERPETUATE:

At record position, set a 5/8" x 24" rebar, with a USFS 3-1/4" aluminum cap 22" in the ground, marked as shown below.



From which new trees:

A hemlock, 12" in diam., bears N.22°E., 61.7', blazed and scribed "4 MS 6191 BT".

A alpine fir, 10" in diam., bears S.28°E., 31.3', blazed and scribed "4 MS 6191 BT".

Place a "Land Survey Monument" (54-9), and a "Bearing Tree" (54-3) sign on the bearing trees. Painted all blazes red, and a 6" red band above the "Bearing Tree" signs. Placed 6' steel posts on property line, 3'+/- from the corner with "Land Survey Marker" (54-9), and "Property Boundary" (54-2) decals.

See Certificate of Survey, recorded in Lincoln County

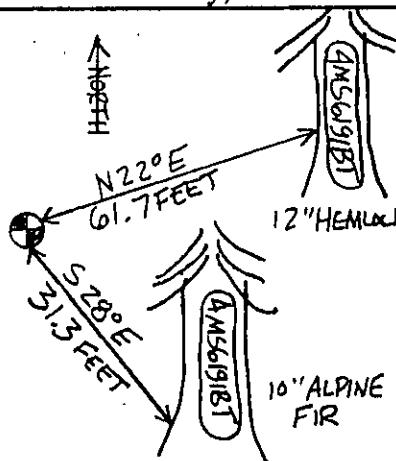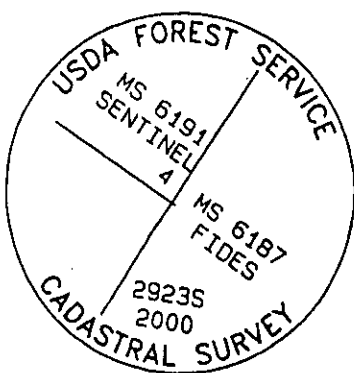

SKETCH OF CORNER

CERTIFICATION

I, Matt Jacobson
certify the information shown herein is true and correct.Matt Jacobson
Signature Ground Party ChiefI, R.A. Ainsworth
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)R.A. Ainsworth
Signature of Surveyor & SealDate: 11/00 Reg. No. 2923SEmployer: Professional Consultants, Inc.Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 10, 2001 was noted on the cross-index plat and is assigned page No. 10484, in book No. Corral M. CummingsCounty Official Corral M. Cummings

Sec.17

