

**INSTRUCTIONS**


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**-CERTIFIED CORNER RECORDATION**

Corner 1/4 corner between Sec 3 T. 26N R. 27W P.M.M. Lincoln County  
Sec 34 T. 27N R. 27W

Record: Set a shale stone 15x12x4 ins. 10ins. in the ground  
 from which:  
 a pine 24" diam. bears N.10°E. 141ks  
 a tamarack 20" diam bears S.40°W. 601ks.

Found 2 bearing trees. Set brass cap

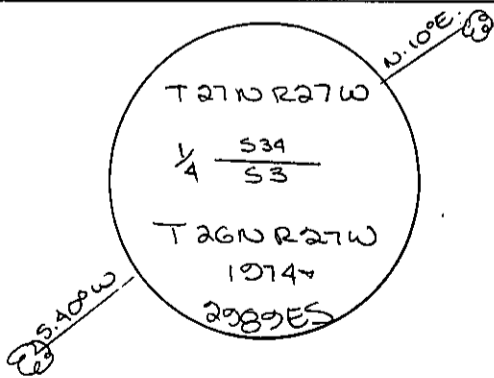

**SKETCH OF CORNER**

**CERTIFICATION**

I, \_\_\_\_\_  
 certify the information shown herein is true and correct.

Signature Ground Party Chief


I, D.K. Marquardt  
 certify that this Corner Record correctly represents work performed  
 by me or under my direction in compliance with the "Corner  
 Recordation Act" (70-22-101, et seq., M.D.A.)

D.K. Marquardt  
 Signature of Surveyor Seal

Date: 7-21-81 Reg. No. 22889ES

Employer: \_\_\_\_\_

Office of Clerk and Recorder, County of Lincoln. This "corner  
 record" was filed for record on the 12<sup>th</sup> August day of 1981,  
 was noted on the cross-index plat and is assigned page No. 1180, in  
 book No. 1 \_\_\_\_\_  
Edward L. Toupin, by Betty Bell,  
 County Official deputy



• - corner this sheet

Cross Index No. A-15 T. 26N R. 27W P.M.M.  
2-15 T. 27N R. 27W