County

LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Permit # 24-2851

Issue Date: 03/28/2024 Expiration Date: 03/27/2025

Property Owner: Dave Blackburn

Mailing Address: [redacted]

Installer: Tom Cole License #: 1

Approved Work: (Check One) ☐ New Installation ☒ Existing System

☒ Replace Drainfield ☒ Replace Tank ☐ Extension

Describe: Installation of replacement wastewater system.

Parcel Description:

Legal: S17, T30 N, R29 W, COS 4341, PARCEL C, ACRES 5.88, JENNINGS LANDING

Property Address: 47 Rapids VW Libby, MT 59923 River Bend Assessment Code: 2851

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of replacement wastewater system pressure dosed with reduction for chambers. Daily usage may not exceed 350 GPD and 164 total meals per day is the maximum allowed.

# of Bedrooms: 350 GPD Septic Tank Size: 1500/500 gallons Trench Width: 36"

# of Laterals: 3 Length of Laterals: 76' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, RS

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

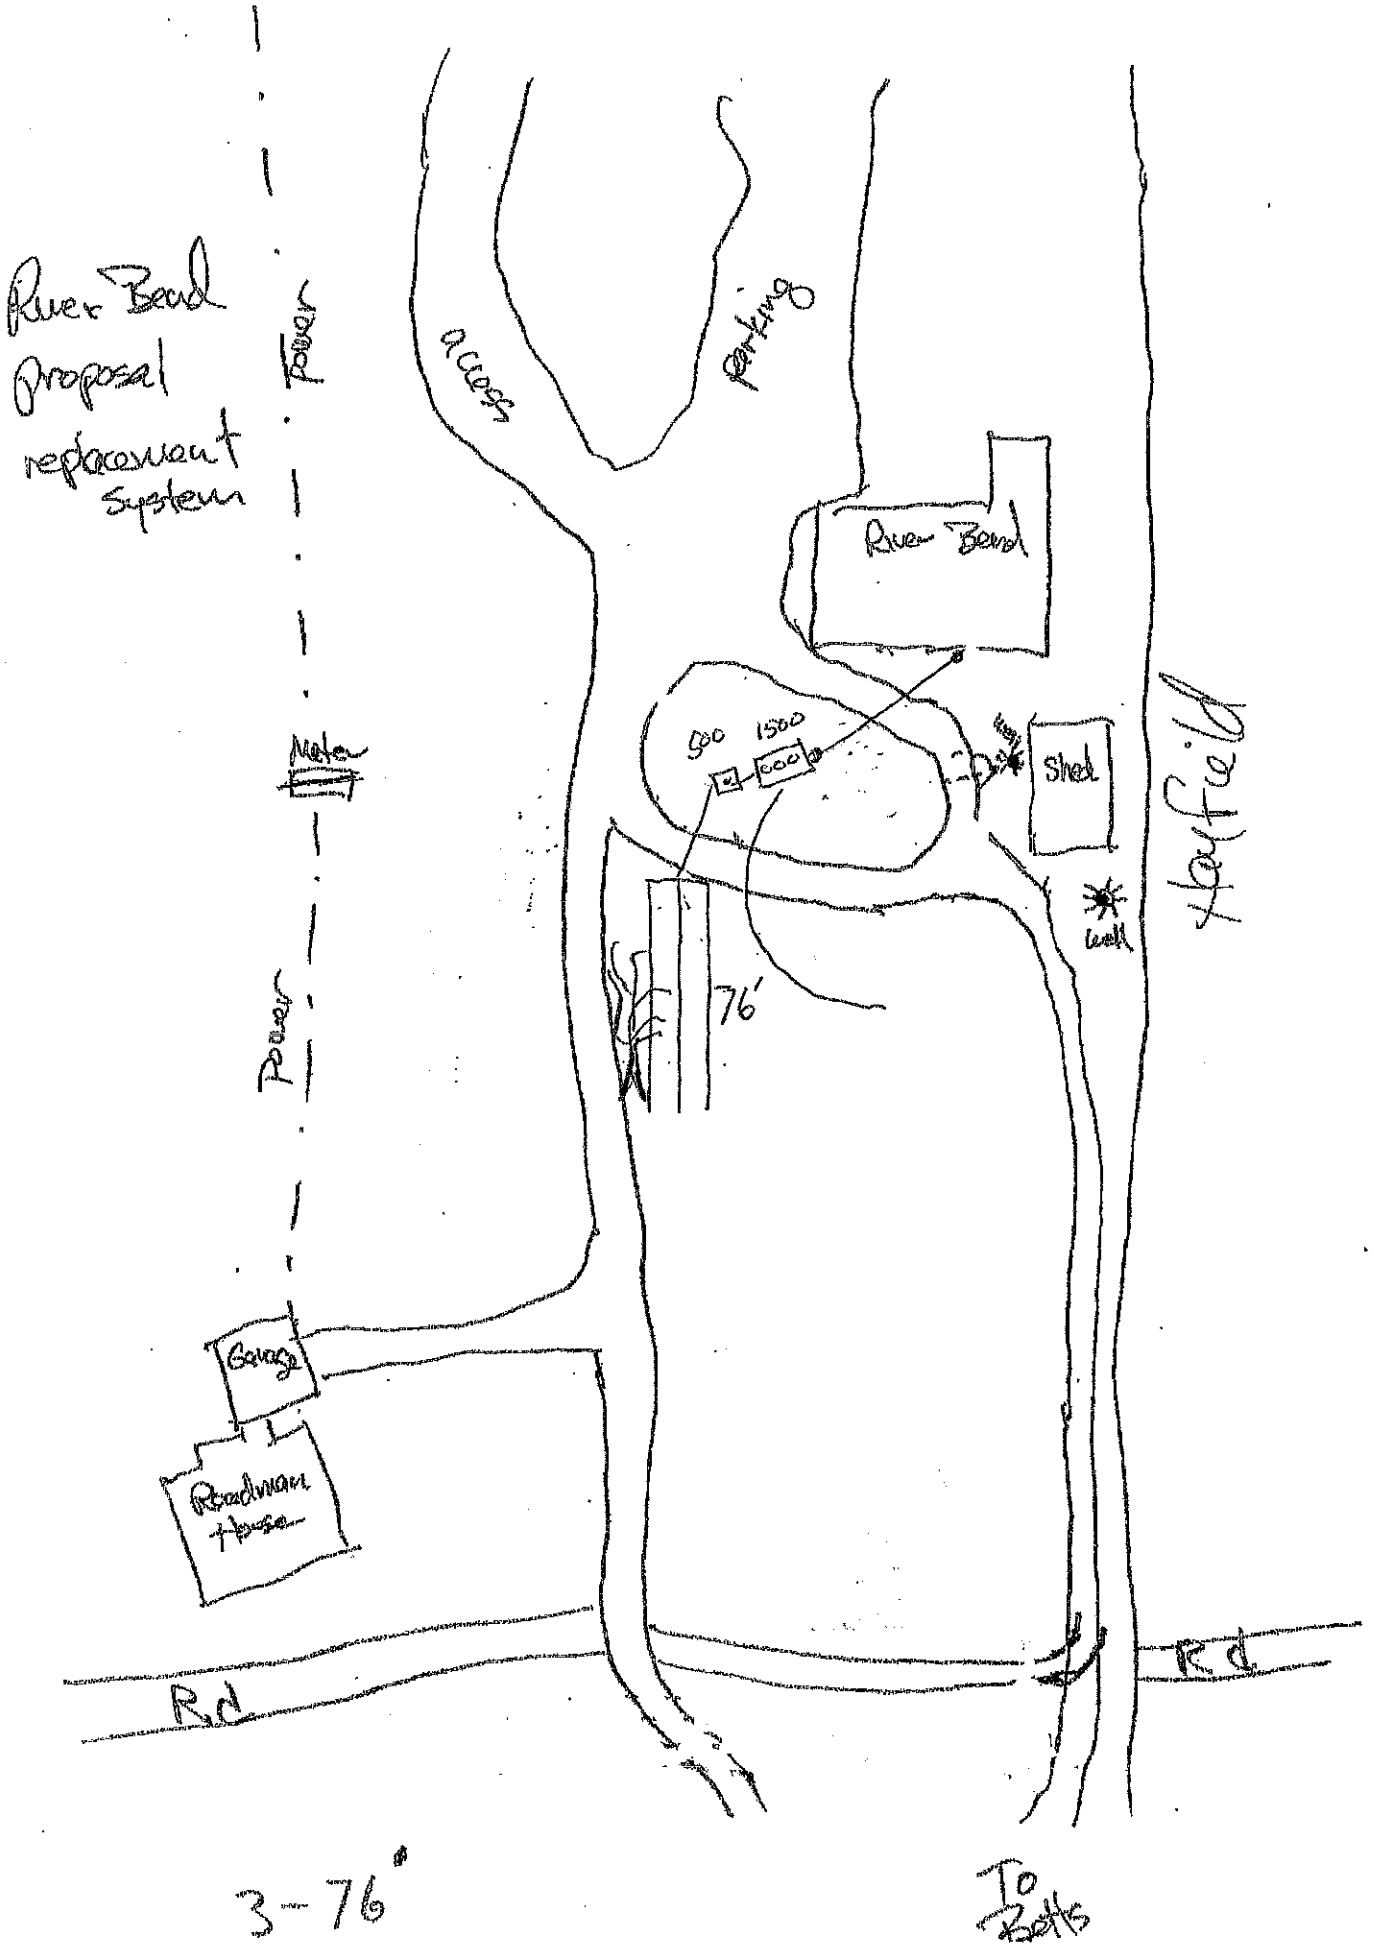
This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Thomas J Cole *Date:* 4-2-24

____ Lincoln County Health Department (LCHD) TC Licensed Installer w/ approval of LCHD

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


River Bend
Proposal
replacement
system
Power
Access
Parking
River Bend
Meter
500
1500
Shed
Hayfield
well
76'
Power
Gauge
Roadman House
Rd
Rd
3-76'
To Bath