

CERTIFIED CORNER RECORDATION

CORNER W 1/4 S 8 T. 26 N., R. 28 W., P.M.M. LINCOLN COUNTY

RECORD:

Per GLO Records of Charles H. Albee and William K. Trippet of June 10 1903 Contract No. 440

Set a porphyry stone, 14x12x10 ins., 10 ins. in the ground, for 1/4 sec. cor., marked 1/4 on W. face;
From which

A pine, 10 ins. diam., bears N.78°10'E., 31 lks. dist., marked 1/4 S 8 BT.

A fir, 9 ins. diam., bears N.83°10'W., 120 lks. dist., marked 1/4 S 7 BT.

FOUND EVIDENCE:

Original stone and bearing tree with visible scribe & tag original stump hole bears N55°E 14.38 feet
dist Per Corner Rec of Thomas Sands of 9/25/78

PERPETUATION:


Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 30 inches long with
original stone set along side. From which

A 11 inch DBH Tamarack scribed T26N R28W 1/4 S7 BT. bears N35°W 47.30 ft. dist.

A 12 inch DBH Douglas Fir scribed T26N R28W 1/4 S8 BT. bears N19°E 52.20 ft. dist.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

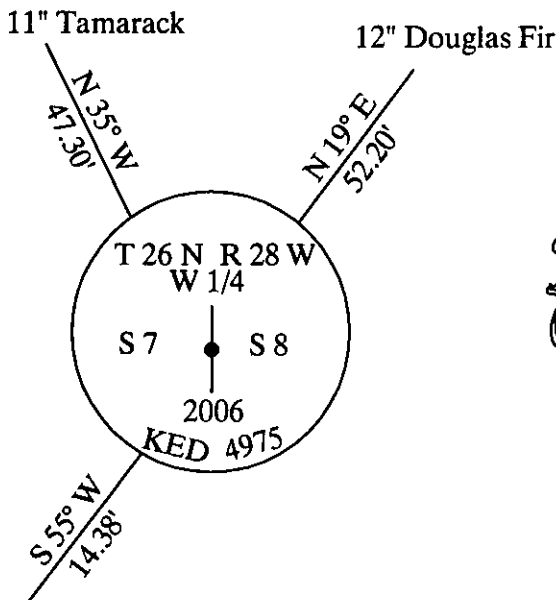

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

KENNETH E. DAVIS

certify that this Corner Record correctly represents work
performed by me or under my direction in compliance with the
"Corner Recordation Act"

(70-22-01, MONTANA M.C.A.)

DAVIS

Signature of Surveyor & Seal

Date 5/26/06 Reg. No. 4975-S

Employed by DAVIS SURVEYING INC

Original dead on
ground

SKETCH OF CORNER

SECTION

Office of Clerk and Recorder, County of _____

This "corner rec" 194637 BOOK: CCR CC&R'S PAGE: 10934 Pages: 1

was noted on the STATE OF MONTANA LINCOLN COUNTY


No. _____ RECORDED: 06/08/2006 11:10 KOI: CC&R'S

In book No. _____ CORAL M. CUMMINGS CLERK AND RECORDER

FEE: \$0.00

BY: Leanne Stearns

TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935



Cross Index No. W 1/4 S 8 T. 26 N., R. 28 W., P.M.M.

THIS CORNER