

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

CERTIFIED CORNER RECORDATIONCorner: Section Corner; Secs. 20, 21 28, 29T. 26N.R. 28W. P.M.M. Lincoln County

GLO

1903 Record: Set 3 ft. quaking aspen post w/ marked stone. Dug pits in each section. Raised a mound of stone W. of corner.

Marquardt

1964 Record:

Found old fence corner.

Set 2" iron pipe with brass cap, from which:

A 3/4" iron pipe stake, bears easterly, 49.26 ft., w/ brass tag ES2989

A 3/4" iron pipe stake, bears southerly, 20.00 ft., w/ brass tag ES2989

A 3/4" iron pipe stake, bears westerly, 20.00 ft., w/ brass tag ES2989

2009 Found:

We find a 2" iron pipe with a 2" brass cap, 16" above the ground, loosely set in an irrigation ditch, marked as shown below.

We find easterly reference monument, a 3/4" iron pipe, above the ground.

The southerly reference monument probably removed by irrigation mainline construction in early 1980s and the westerly reference monument possibly removed by heavy livestock travel in area.


2009 Perpetuation:

At the location of the base of the iron pipe, we reset the iron pipe and build a ring of stone around the monument, from which we establish the following reference monuments:

An 8" fence post, bears S65°E, 9.95 ft., w/ PK nail in north side

A 10" fence post, bears S03°E, 4.6 ft., w/ PK nail in west side

BT tags 0.5' above ground

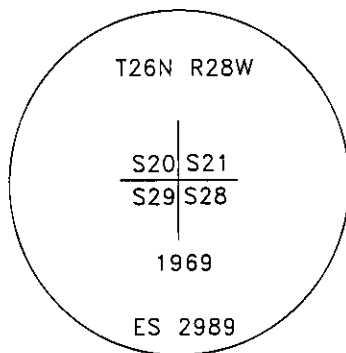SEE COS NO. 3991**SKETCH OF CORNER****CERTIFICATION**I, Chad R. Breuer

certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Ken E Jenkins

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Montana Recordation Act" (70-22-101 and 70-22-102, M.C.A.)

Signature of Surveyor & Seal

Date: 10/2009 Reg. No. 9330 LSEmployer: Montana Northwest CompanyPO Box 8777, Missoula, MT 59807406-721-4033 Project No. 1617-09

Office of Clerk and Recorder, County of _____ This "corner

record" was filed for record on 224824 BOOK: CCR CC&R'S PAGE: 11450 Pages: 1

was noted on the cross-index pla

book No. _____

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/05/2010 8:53 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER


FEE: \$0.00

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

Cross Index No.

R-9 T. 26N R 28W PMM

Sec. 28



● Corner this sheet