LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 11/08/2022 (original issued 9/7/21) Expiration Date: 11/07/2023

Property Owner: Robert & Marsue Jateff

Mailing Address: [redacted]

Telephone: [redacted] E-mail:

Installer: AEA Excavating LLC License #: 175

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Pressure dosed system with sandlined trenches

Parcel Description:

Legal: SILVER TIP RANCH, BLOCK 2, LOT 17, S22, T37N, R31W, 1.3061 ACRES

Property Address: 458 Silver Dr., Troy, MT 59935 Assessment Code: 53624

DEQ COSA: EQ# Date:

Approved Design Criteria:

# of Bedrooms: 2 Septic Tank Size: 1000/500 gallons Trench Width: 24"

# of Laterals: 2 Length of Laterals: 52' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Kathi Hooper, RS

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

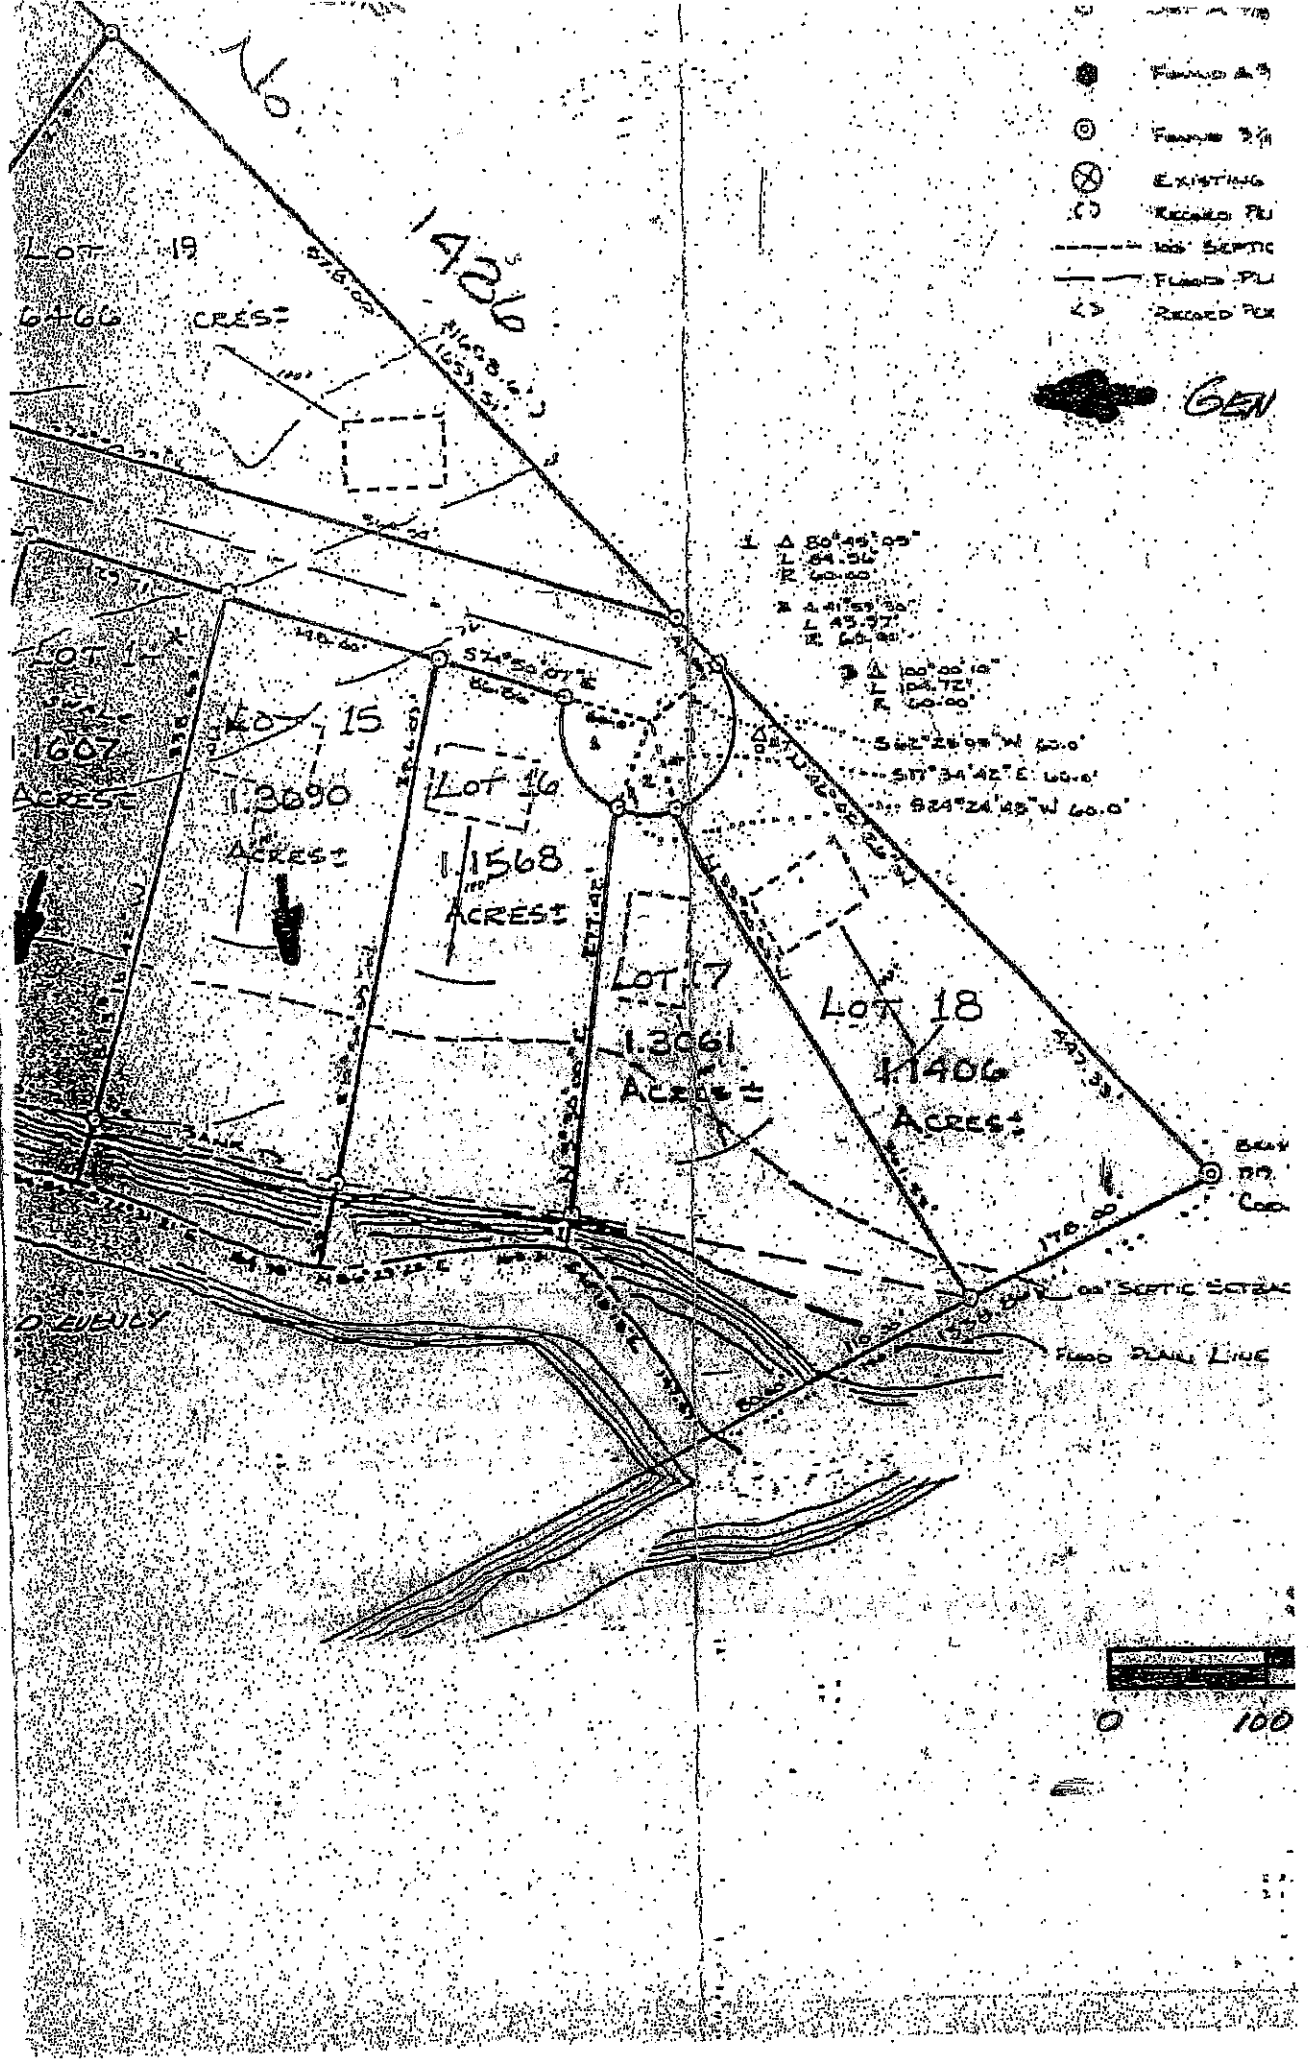
This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: [signature] *Date:* 8/25/23

✓ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.


LOT 19
CREST
LOT 1
1.1607 ACRES±
1.2090 ACRES±
LOT 16
1.1568 ACRES±
LOT 17
1.3061 ACRES±
LOT 18
1.1406 ACRES±
S74°30'07"E 84.66'
S62°28'09"W 60.0'
S17°34'42"E 60.0'
S24°24'45"W 60.0'
100' SEPTIC SETBACK
FLOOD PLAIN LINE
0
100