

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner of Secs. 31 &amp; 32

26N

28W

Corner of Secs. 5 &amp; 6

T. 25N

R. 28W

P.M.M. Lincoln

County

I. 1903 GLO Record: Set a porphyry stone, 14 x 10 x 5 ins., 10 ins. in the ground, for cor. of secs. 5, 6, 31, and 32, mkd. with 5 notches on E. and 1 notch on W. edge and scribed 4 bearing trees.

1964 J. M. Tillotson Re-monumentation Record: At the position for the corner common to secs. 31, 32, 5, and 6, T's 25 and 26N R28W., found the original stone, 14 x 10 x 5 ins., firmly set 10 ins. in the ground with 5 notches on the E. face and 1 notch on the W. face; from which:

A Ponderosa Pine, 31 ins. diam., bears N.16°E., 79 lks. dist., scribed T26N R28W S32 visible.

A Ponderosa Pine, 32 ins. diam., bears S.06°E., 86 lks. dist., scribed T25N R28W., scribing visible.

A stump hole bears S.86°W., 49 lks. dist., tree decayed.

A Douglas Fir, 24 ins. diam., bears N.69°W., 102 lks. dist., scribing overgrown.

At the corner point;

Set a 2 in. galvanized iron pipe 26 ins. in the ground at center point of original stone with a brass cap marked:

T26N R28W  
S31 S32  
S6 S5  
T25N  
1964  
ART 858ES IMT

from which the following new references:

A Douglas Fir, 10 ins. diam., bears N39°E., 28 lks. dist., scribed S32 RM.

A Douglas Fir, 7 ins. diam., bears S28½°E., 29 lks. dist., scribed S5 RM.

A Ponderosa Pine, 10 ins. diam., bears S63°W., 23 lks. dist., scribed S6 RM.

A Douglas Fir, 8 ins. diam., bears N65°W., 51 lks. dist., scribed S31 RM.

Buried the original stone alongside the iron pipe.

II. Found a 2 in. diam. iron pipe, protruding 5 ins. above the ground with a 2½ in. diam. brass cap marked as per 858ES's recordation, from which the following references:

A pine, 32 ins. diam., bears N.15°E., 81.8 lks. (54.0 ft.) dist., T26N R28W S32 visible scribing.

A fir snag, 10 ins. diam., bears N.38°E., 28.3 lks. (18.7 ft.) dist., scribing visible.

A fir, 9 ins. diam., bears S.28°E., 29.2 lks. (19.3 ft.) dist., scribing covered with an overgrown blaze.


A pine, 32 ins. diam., bears S.05°E., 86.7 lks. (57.2 ft.) dist., scribing covered with an overgrown blaze.

A pine, 11 ins. diam., bears S.62°W., 23 lks. (15.2 ft.) dist., scribing covered with an overgrown blaze.

A fir, 24 ins. diam., bears N.67°W., 100.7 lks. (66.5 ft.) dist., scribing covered with an overgrown blaze.

A fir, 8 ins. diam., bears N.64°W., 51.5 lks. (34.0 ft.) dist., scribing visible.

III. Set a guard post, with a "Survey Marker" decal attached, 2 ft. North from corner.  
Painted a red band around each bearing tree and attached "Land Survey Monument" and "Bearing Tree" signs.

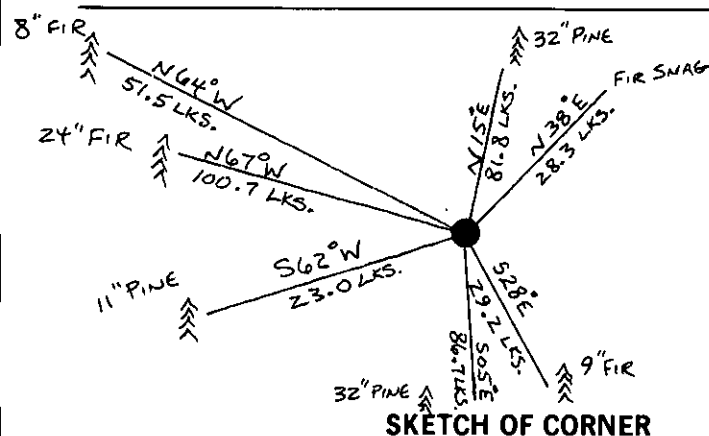

## CERTIFICATION

I, Steven Boyer

certify the information shown herein is true and correct.

Thomas C. Hill  
Signature of Third Party Chief

I, Thomas C. Hill

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, Sec. 1, M.C.A.)

Thomas C. Hill  
Signature of Surveyor

Date: 9/85 Reg. No. 5612

Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln. This "corner


record" was filed for record on Oct 7, 1985

was noted on the cross-index plat and is assigned page No. 3129, in

book No. \_\_\_\_\_

Just B.F. Sigel by Bill Buckoff  
County Official

Sec. 31



Cross Index No. 7-05 T. 26N R. 28W PMM

• - corner this sheet

# INSTRUCTIONS TO SURVEYORS FOR COMPLETION OF CERTIFIED CORNER RECORDATION FORMS

## I. ORIGINAL AND/OR SUBSEQUENT RECORD:

This item should describe or quote those portions of the original or subsequent record which were used in evaluating the corner position. The original record will usually be the General Land Office field notes. Subsequent record can come from several sources: Previously filed corner records, maps and plats, private and public records, etc. Some of the subsequent record, even though not in the public record, but known to have validity by the surveyor, may be quoted and appropriately noted.

The record data helps support the reestablished corner position because it clearly shows what history the surveyor based his corner position on. In some cases, however, the record may be unknown or not pertinent. A statement to that effect should appear on the corner record.

## II. DESCRIPTION OF EVIDENCE FOUND OR METHOD OF LOCATING CORNER POSITION:

This item will describe the original or subsequent record evidence found. If portions of the found evidence cannot be reconciled with the record, then the disregarded record should be noted, and, if possible, an opinion as to its cause narrated.

If no physical evidence of the original or subsequent monuments and accessories can be found, then the method used to reestablish the lost or obliterated corner (single proportion, fence intersection, parol evidence, terrain calls, centerline of road, etc.) shall be indicated.

## III. DESCRIPTION OF MONUMENTS AND ACCESSORIES SET TO PERPETUATE THE CORNER POSITION:

This item should list all details about the corner and its location which will help exclusively identify the corner position; including size and type of monument, how marked if not shown in sketch, and distinguishing topographic calls which help locate the corner. In many cases, instructions on how to find the corner should be included.

References or ties to other corners are optional and may be drawn on the face or back of the corner record form, or references to Certificate of Survey may be made. Separate drawings may be attached to the corner form.

If state plane coordinate values for the corner position are shown, then the control upon which they are based should be indicated.

## IV. SKETCH OF CORNER:

This item will usually show how a found or set corner is marked and may also show topography or accessory monuments found or set and their relation to the corner. There is no stipulated format; the sketch could be transcribed field note entries.

## V. CERTIFICATION:

The name and signature of the ground party chief is optional.

The Surveyor who performed or directed the field work which is depicted on the "Certified Corner Record" shall sign and affix his seal in the Certification.

The employer blank is optional but useful in tracking down original field note data or adjacent record if, in the future, questions arise about the corner.

## VI.

The Cross Index at the bottom of the page should be completed by the Surveyor. Only the single Township Index where the corner is filed shall be completed.

The lower righthand corner is a corner location diagram and should have the pertinent section filled in at the top and a closed circle indicating the appropriate corner position in the section filled in. This is intended to be an aid in searching the "Record" once it has been filed.