

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Secs. 29 & 32 T. 26N R. 28W P.M.M. Lincoln County

I. 1903 GLO Record: Set a fir post, 3 ft. long, 3 ins. square, 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked $\frac{1}{4}$ S29 on N. face and 32 on S. face and mkd. 2 bearing trees.

1964 L. M. Tillotson Remonumentation Record: At the position for the $\frac{1}{4}$ cor. common to secs. 29 and 32, T26N R28W., Found the original wood post lying on the ground. It was scribed $\frac{1}{4}$ S29 on N. face and 32 on the S. face; Found underground remains of wood post, about 3 ins. square, bottom of post was 12 ins. below the surface; from which the following references:

A larch, 18 ins. diam., bears S.09°15'W., 21 lks. dist., scribing overgrown.(Record)

A ponderosa pine, 27 ins. diam., bears N.22°30'W., 23 lks. dist., scribing overgrown.(Record)

At the corner point:

In the center of the remains of the rotted wooden post, Set a 2 in. galvanized iron pipe 26 ins. into the ground with a brass cap mkd.:

T26N R28W
1/4 S29
S32
858ES IMT
ART

from which the following new references:

A white fir, 11 ins. diam., bears S.44°W., 47 lks. dist., scribed S32 RM.

A white fir, 10 ins. diam., bears N.21°E., 48 lks. dist., scribed S29 RM.

Buried the original wood post alongside the iron pipe.

II. Found a 2 in. diam. pipe, 6 ins. out of the ground with a 2 $\frac{1}{2}$ in. brass cap, from which the following references:

A ponderosa pine, 28 ins. diam., bears N.23°W., 24.4 lks. (16.1 ft.) dist., scribing covered with an overgrown blaze.

A larch stump, bears S.09°W., 22 lks.(14.5 ft.) dist.


All other BT's destroyed by logging activity.

III. Established the following new reference:

A white fir, 12 ins. diam., bears S.85°E., 33.5 lks.(22.1 ft.) dist., scribed $\frac{1}{4}$ S32 BT.

Set a guard post, with a "Survey Marker" decal attached, 2 ft. East from corner.

Painted a red band around each bearing tree and attached "Land Survey Monument" and "Bearing Tree" signs.

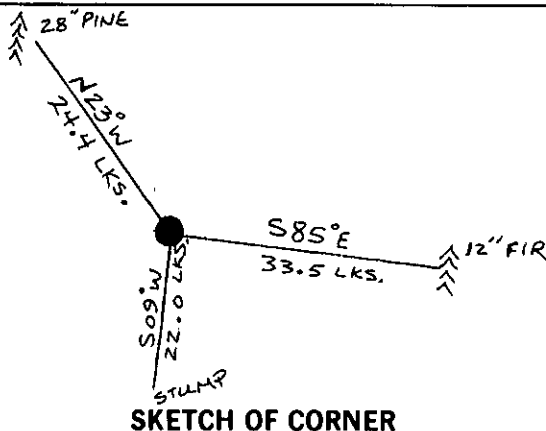

SKETCH OF CORNER

CERTIFICATION

I, Steven Boyer

certify the information shown herein is true and correct.

Steven A. Boyer
Signature of Record Party Chief

I, Thomas C. Heath

certify that this Corner Section correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (78-2101, sec. 14 C.M.S.)

Thomas C. Heath
Signature of Surveyor

Date: 9/85 Reg. No. 5622 S

Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln. This "corner


record" was filed for record on Oct 7, 1985

was noted on the cross-index plat and is assigned page No. 3132 in

book No. _____

Janet St. Sigel by Bill Smith
County Official

Sec. 29



• - corner this sheet

Cross Index No. V-07 T. 26N R. 28W PMM

INSTRUCTIONS TO SURVEYORS FOR COMPLETION OF CERTIFIED CORNER RECORDATION FORMS

I. ORIGINAL AND/OR SUBSEQUENT RECORD:

This item should describe or quote those portions of the original or subsequent record which were used in evaluating the corner position. The original record will usually be the General Land Office field notes. Subsequent record can come from several sources: Previously filed corner records, maps and plats, private and public records, etc. Some of the subsequent record, even though not in the public record, but known to have validity by the surveyor, may be quoted and appropriately noted.

The record data helps support the reestablished corner position because it clearly shows what history the surveyor based his corner position on. In some cases, however, the record may be unknown or not pertinent. A statement to that effect should appear on the corner record.

II. DESCRIPTION OF EVIDENCE FOUND OR METHOD OF LOCATING CORNER POSITION:

This item will describe the original or subsequent record evidence found. If portions of the found evidence cannot be reconciled with the record, then the disregarded record should be noted, and, if possible, an opinion as to its cause narrated.

If no physical evidence of the original or subsequent monuments and accessories can be found, then the method used to reestablish the lost or obliterated corner (single proportion, fence intersection, parol evidence, terrain calls, centerline of road, etc.) **shall** be indicated.

III. DESCRIPTION OF MONUMENTS AND ACCESSORIES SET TO PERPETUATE THE CORNER POSITION:

This item should list all details about the corner and its location which will help exclusively identify the corner position; including size and type of monument, how marked if not shown in sketch, and distinguishing topographic calls which help locate the corner. In many cases, instructions on how to find the corner should be included.

References or ties to other corners are optional and may be drawn on the face or back of the corner record form, or references to Certificate of Survey may be made. Separate drawings may be attached to the corner form.

If state plane coordinate values for the corner position are shown, then the control upon which they are based should be indicated.

IV. SKETCH OF CORNER:

This item will usually show how a found or set corner is marked and may also show topography or accessory monuments found or set and their relation to the corner. There is no stipulated format; the sketch could be transcribed field note entries.

V. CERTIFICATION:

The name and signature of the ground party chief is optional.

The Surveyor who performed or directed the field work which is depicted on the "Certified Corner Record" shall sign and affix his seal in the Certification.

The employer blank is optional but useful in tracking down original field note data or adjacent record if, in the future, questions arise about the corner.

VI.

The Cross Index at the bottom of the page should be completed by the Surveyor. Only the single Township Index where the corner is filed shall be completed.

The lower righthand corner is a corner location diagram and should have the pertinent section filled in at the top and a closed circle indicating the appropriate corner position in the section filled in. This is intended to be an aid in searching the "Record" once it has been filed.