LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Permit # 23-5537

Issue Date: 07/03/2023 Expiration Date: 07/02/2024

Property Owner: Lisa Miller

Mailing Address: [redacted]

Telephone: [redacted] E-mail: [redacted]

Installer: Dale Schmidt License #: 135

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of gravity system with chambers.

Parcel Description:

Legal: PINE BAY NO 2, S15, T36 N, R28 W, LOT 1 OF AMDED LOT47, PM 6544 IN SEC 22 1.31 ACRES

Property Address: 96 Pine Bay Dr., Rexford, MT 59930 Assessment Code: 5537

DEQ COSA: EQ#27-77-K855 Date: 08/17/77

Approved Design Criteria: Installation of new gravity system with chambers.

# of Bedrooms: 3	Septic Tank Size: 1000 gallons	Trench Width: 24"
# of Laterals: 2	Length of Laterals: 64'	Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, SIT*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:


This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

_____ Lincoln County Health Department (LCHD) _____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

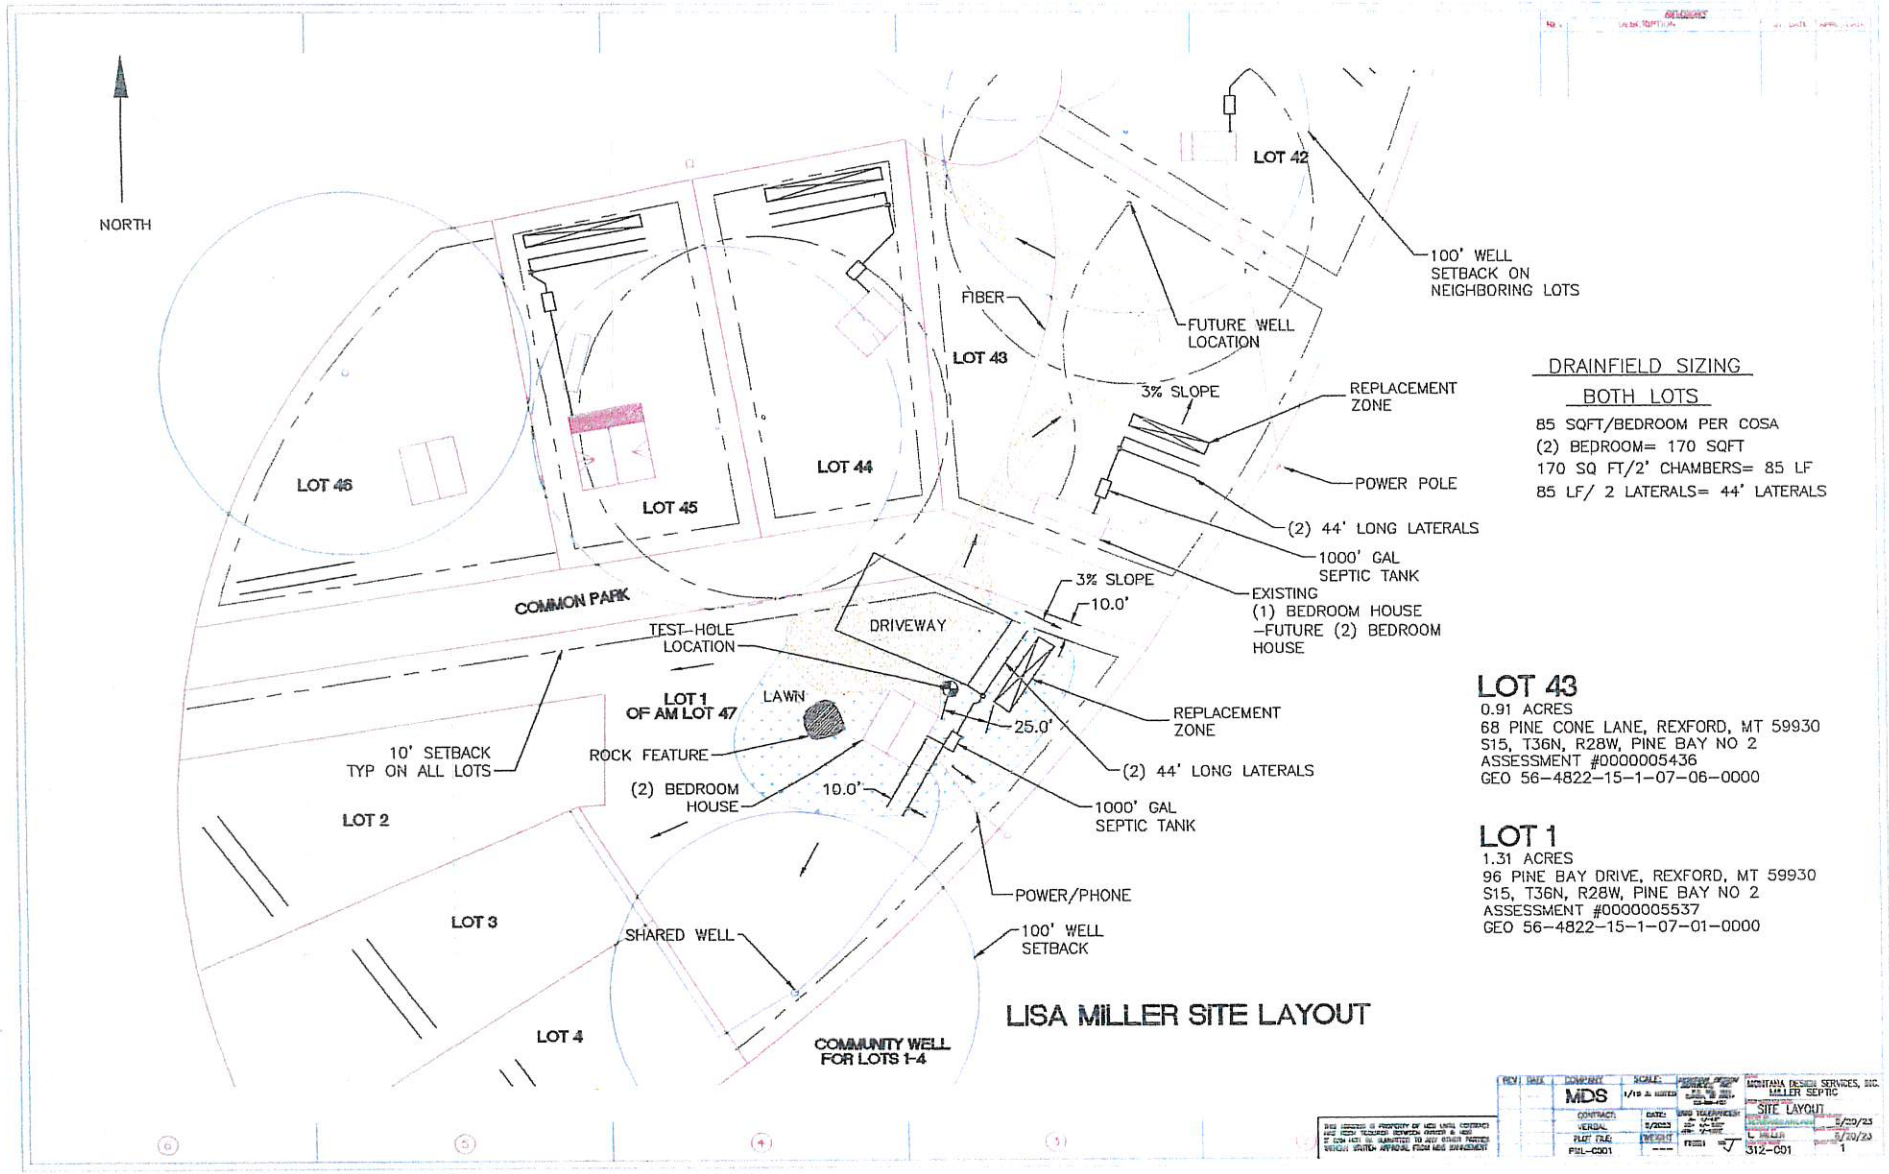

DRAINFIELD SIZING

BOTH LOTS

85 SQFT/BEDROOM PER COSA
(2) BEDROOM= 170 SQFT
170 SQ FT/2' CHAMBERS= 85 LF
85 LF/ 2 LATERALS= 44' LATERALS

LOT 43

0.91 ACRES
68 PINE CONE LANE, REXFORD, MT 59930
S15, T36N, R28W, PINE BAY NO 2
ASSESSMENT #0000005436
GEO 56-4822-15-1-07-06-0000

LOT 1

1.31 ACRES
96 PINE BAY DRIVE, REXFORD, MT 59930
S15, T36N, R28W, PINE BAY NO 2
ASSESSMENT #0000005537
GEO 56-4822-15-1-07-01-0000

MDS
MONTANA DESIGN SERVICES, INC.
MILLER SEPTIC
SITE LAYOUT
5/20/23
312-001