

# CERTIFIED CORNER RECORDATION

Corner Sec. Cor. 18|17 <sup>7|8</sup> T. 26 N., R. 29 W., P.M.M. Lincoln County

Record :

1903 GLO Township Subdivision by Gov't Surveyors C.H. Albee and W.K. Trippet.

"80.00 chs. Set a sandstone, 18x12x6 ins., 14 ins. in the ground, for cor. of Secs. 7, 8, 17 and 18, marked with 4 notches on S. and 5 notches on E. edge; and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Pits impracticable."

Found Evidence :

During a field search of the area, a sandstone 19x6x6 ins., 12 ins. in the ground firmly set was found with no visible notching. A mound of stone 1 1/2 ft. high with a 2 ft. wide base bears north of corner (record west of corner).

Perpetuation :

At the found stone monument position we replace it with a 2 1/4 in. diam. alum. pipe 30 ins. long, 26 ins. in the ground with a 3 1/4 in. diam. alum. cap marked as shown below, from which:

- A Western Tamarack, 7 1/2 ins. diam. bears N 85° W, 23.70 ft. dist., scribed (T26N R29W S7 BT).
- A Douglas Fir, 13 1/4 ins. diam. bears N 76°30' E, 34.30 ft., dist., scribed (T26N R29W S8 BT).
- A Lodgepole Pine, 9 1/4 ins. diam. bears S 35° E, 29.90 ft. dist., scribed (T26N R29W S17 BT).
- A Douglas Fir, 2 ins. diam. bears S 24° W, 37.60 ft. dist., scribed (BT) at base.

Painted 6 in. wide bands and scribed faces red on all Bearing Trees.

Set a 6 ft. long steel post with attached Land Survey Monument and Property Line decals 2 ft. in the ground, 3 ft. north on line from set monument.

Raise a mound of stone with found original stone around set alum. monument.


Attached Bearing Tree and Land Survey Monument signs to all trees.



Magnetic Declination: 18° East

<p style="font-size: small;">Sketch of Corner</p>	<p><b>CERTIFICATION</b></p> <p>I, <u>John Damon</u>  <small>certify the information shown herein is true and correct</small></p> <p><i>John Damon</i>  <small>Signature of Ground Party Chief</small></p> <p>I, <u>Ken E. Davis</u>  <small>certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)</small></p> <p><i>Ken E. Davis</i>  <small>Signature of Surveyor &amp; Seal</small></p> <p>Date: _____ Reg. No. <u>4975 S</u>  <small>REGISTERED SURVEYOR</small></p> <p>Employer: <u>Davis Surveying, Inc.</u></p>
---	--

Office of Clerk and Recorder, County of Lincoln  
 This "corner record" was filed for record on 9-9-93  
 was noted on the cross-index plat and is assigned page No. 10206  
 in book No. \_\_\_\_\_  
*Carol M. Cunningham*  
 County Official

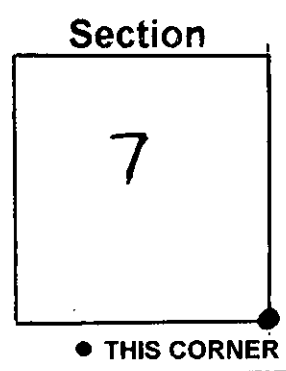

Cross Index No. 7|8 Sec. Cor. 18|17 T. 26 N., R. 29 W., PMM