LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 08/15/2023 Expiration Date: 08/14/2024

Property Owner: Martin Price

Mailing Address: [redacted]

Telephone: [redacted] E-mail: [redacted]

Installer: Sawtooth Excavation License #: 160

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of pressure dosed system.

Parcel Description:

Legal: S20, T30 N, R33 W, C.O.S. 4748 FC, PARCEL C, ACRES 8.82

Property Address: 27163 US HWY 56 Assessment Code: 13316

DEQ COSA: EQ#23-2285 Date: 007/25/2023

Approved Design Criteria: Installation of pressure dosed system.

# of Bedrooms: 2 Septic Tank Size: 1000/500 gallon Trench Width: 36"

# of Laterals: 4 Length of Laterals: 95' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, SIT

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 8/29/23

____ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

SV

RECEIVED
JUL 25 2023
MT DEQ PUBLIC WATER & SUBDIVISIONS


LINCOLN COUNTY, MONTANA


LOT LAYOUT

PER C.O.S. 4748 FC
SECTION 20, TWP. 30 N., R. 33 W., P.M.M.
FOR: SHIRLEY AND MARTIN PRICE
DATE: JANUARY 2023

LEGEND

- PROPOSED PRIMARY DRAINFIELD 4-36" X 95' TRENCHES 10' APART
- PROPOSED REPLACEMENT DRAINFIELD 4-36" X 95' TRENCHES 10' APART
- TP / PT SOIL PROFILE
- PERCOLATION SITE
- WELL SITE (EXISTING)
- SLOPE

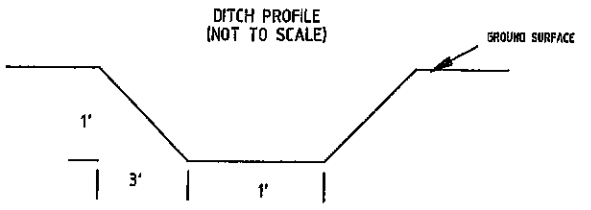

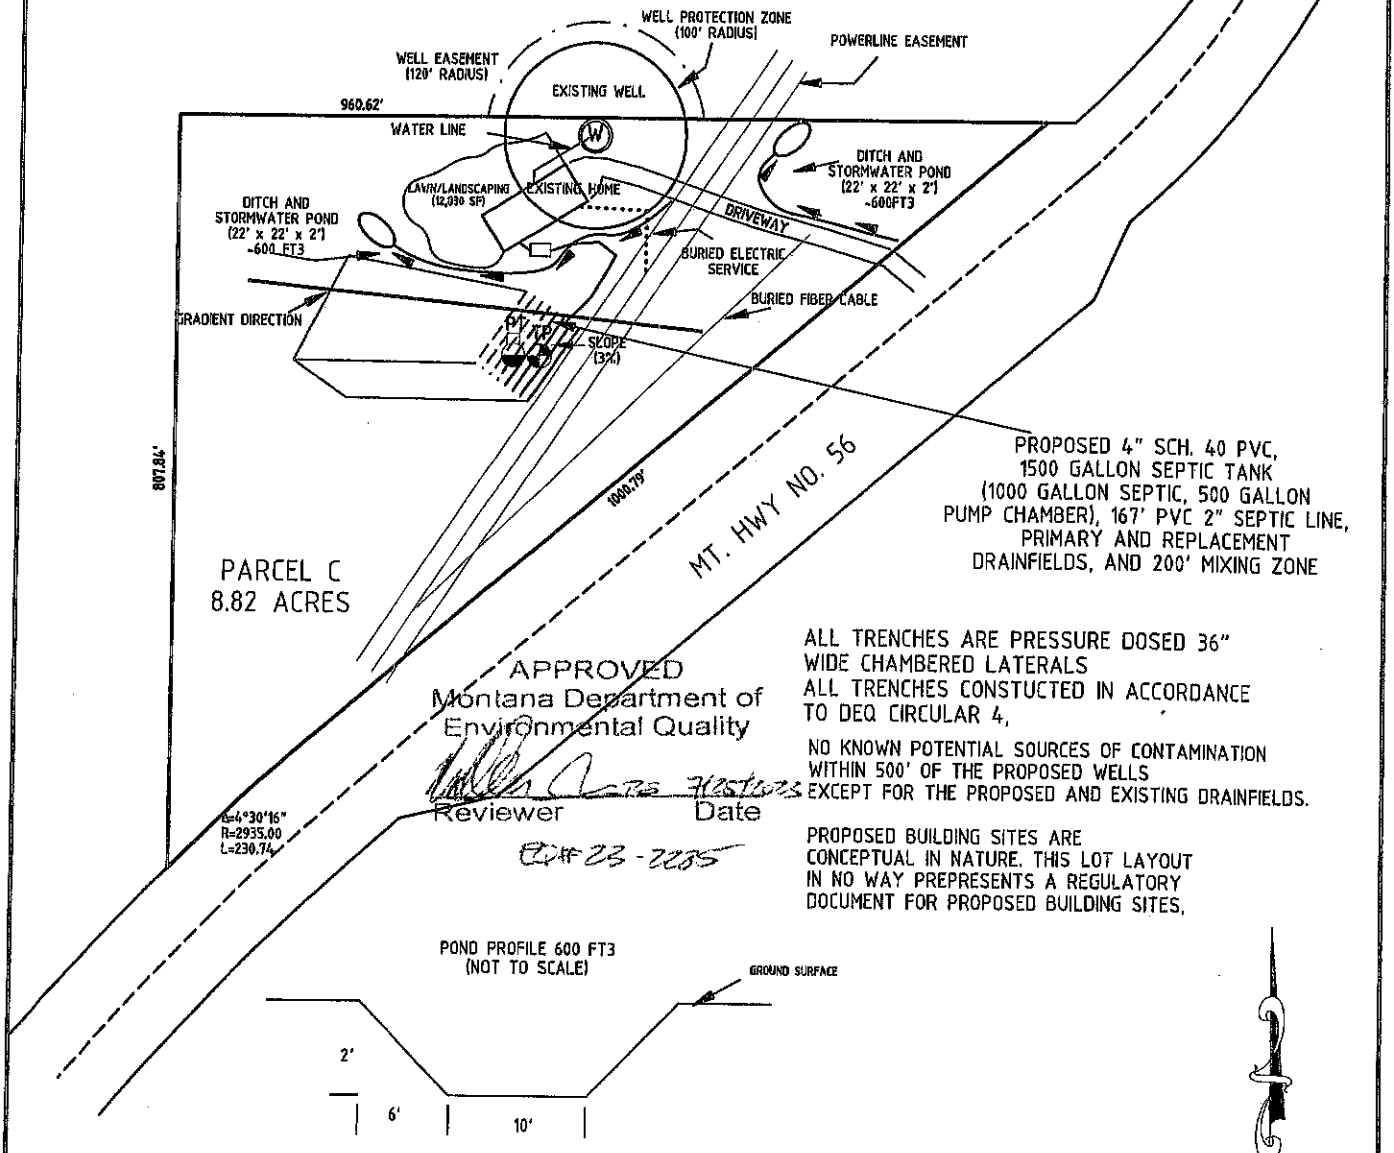

PROPOSED 4" SCH. 40 PVC,
1500 GALLON SEPTIC TANK
(1000 GALLON SEPTIC, 500 GALLON
PUMP CHAMBER), 167' PVC 2" SEPTIC LINE,
PRIMARY AND REPLACEMENT
DRAINFIELDS, AND 200' MIXING ZONE

APPROVED
Montana Department of
Environmental Quality


Reviewer Date

EQF 23-2235

ALL TRENCHES ARE PRESSURE DOSED 36"
WIDE CHAMBERED LATERALS
ALL TRENCHES CONSTUCTED IN ACCORDANCE
TO DEQ CIRCULAR 4,

NO KNOWN POTENTIAL SOURCES OF CONTAMINATION
WITHIN 500' OF THE PROPOSED WELLS
EXCEPT FOR THE PROPOSED AND EXISTING DRAINFIELDS.

PROPOSED BUILDING SITES ARE
CONCEPTUAL IN NATURE. THIS LOT LAYOUT
IN NO WAY PREPRESENTS A REGULATORY
DOCUMENT FOR PROPOSED BUILDING SITES.



DAVIS SURVEYING, INC.
TROY, MT. 406.295.5441

DATE: 01/12/2023
DRAWN BY: KD, PhD

FILE: PRICE LOT LAYOUT