INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.

- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
- 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
- 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

CERTIFIED CORNER RECORDATION

Corner: C 1/4 Corner; Sec. 14

T. 26N.

R. 29W. P.M.M. Lincoln County

Record:

No previous record

Found:

No evidence found

2009 Perpetuation:

At a position established by the survey and section breakdown of Section 14, we set a standard U.S.F.S. monument with a 3 1/4" U.S.F.S. alum cap, flush with the ground, marked as shown below, from which, we establish the following reference monuments:


A 9" Douglas fir, bears S44°W, 23.3 ft., scribed C 1/4 S14 BT A 7" Douglas fir, bears N25°W, 7.2 ft., scribed C 1/4 S14 BT

We build a mound of stone around the monument, with a 3 ft. base, 1 ft. high.

We set a galvanized steel post with U.S.F.S. decals P54-1 & P71-10, 2.2 ft., north of the monument.

We paint red bands on the bearing trees and attach U.S.F.S. signs 54-3 & 54-9.

SEE COS NO. 3990

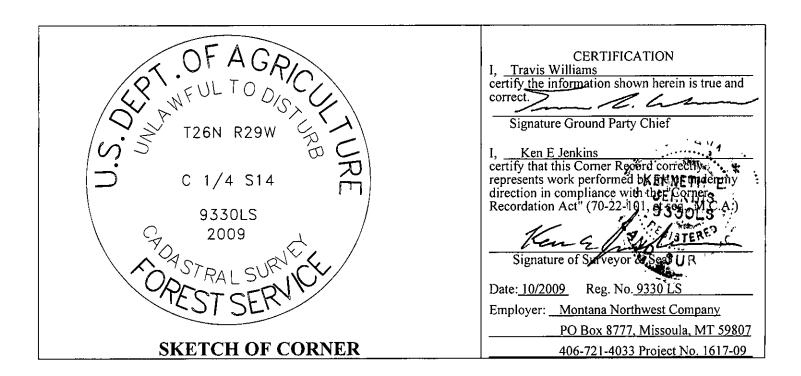

		Sec.	14
Office of Clerk and Recorder,	County of This "corner		
record" was filed for record or	224843 BOOK: CCR CCGR'S PAGE: 11469 Pages: 1		
was noted on the cross-index	STATE OF MONTANA LINCOLN COUNTY RECORDED: 03/05/2010 9:11 KOI: CCER'S	-	
book No.	TAMMY D. LAUER CLERK AND RECORDER FEE: \$0.00 BY: Seume Seums		
	TO: MONTANA HORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA		

Cross Index No.

<u>L-19</u> T. <u>26N</u> R <u>29W</u> PMM

Corner this sheet