LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/31/2023 Expiration Date: 10/30/2024

Property Owner: Clyde Robbe

Mailing Address: [redacted]

Telephone: [redacted] E-mail: [redacted]

Installer: Buck Schermerhorn License #: 135

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new gravity septic system.

Parcel Description:

Legal: S26, T36 N, R26 W, COS PM 6693, ACRES 40.156, REMAINDER PARCEL

Property Address: 338 J. Robbe Trail Eureka, MT 59917 Assessment Code: 54800

DEQ COSA: EQ# Date:

Approved Design Criteria: Installation of new septic system with 4 laterals @ 100' with reduction for chambers.

# of Bedrooms: 4	Septic Tank Size: 1500 gallons	Trench Width: 24"
# of Laterals: 4	Length of Laterals: 100'	Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, S97

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

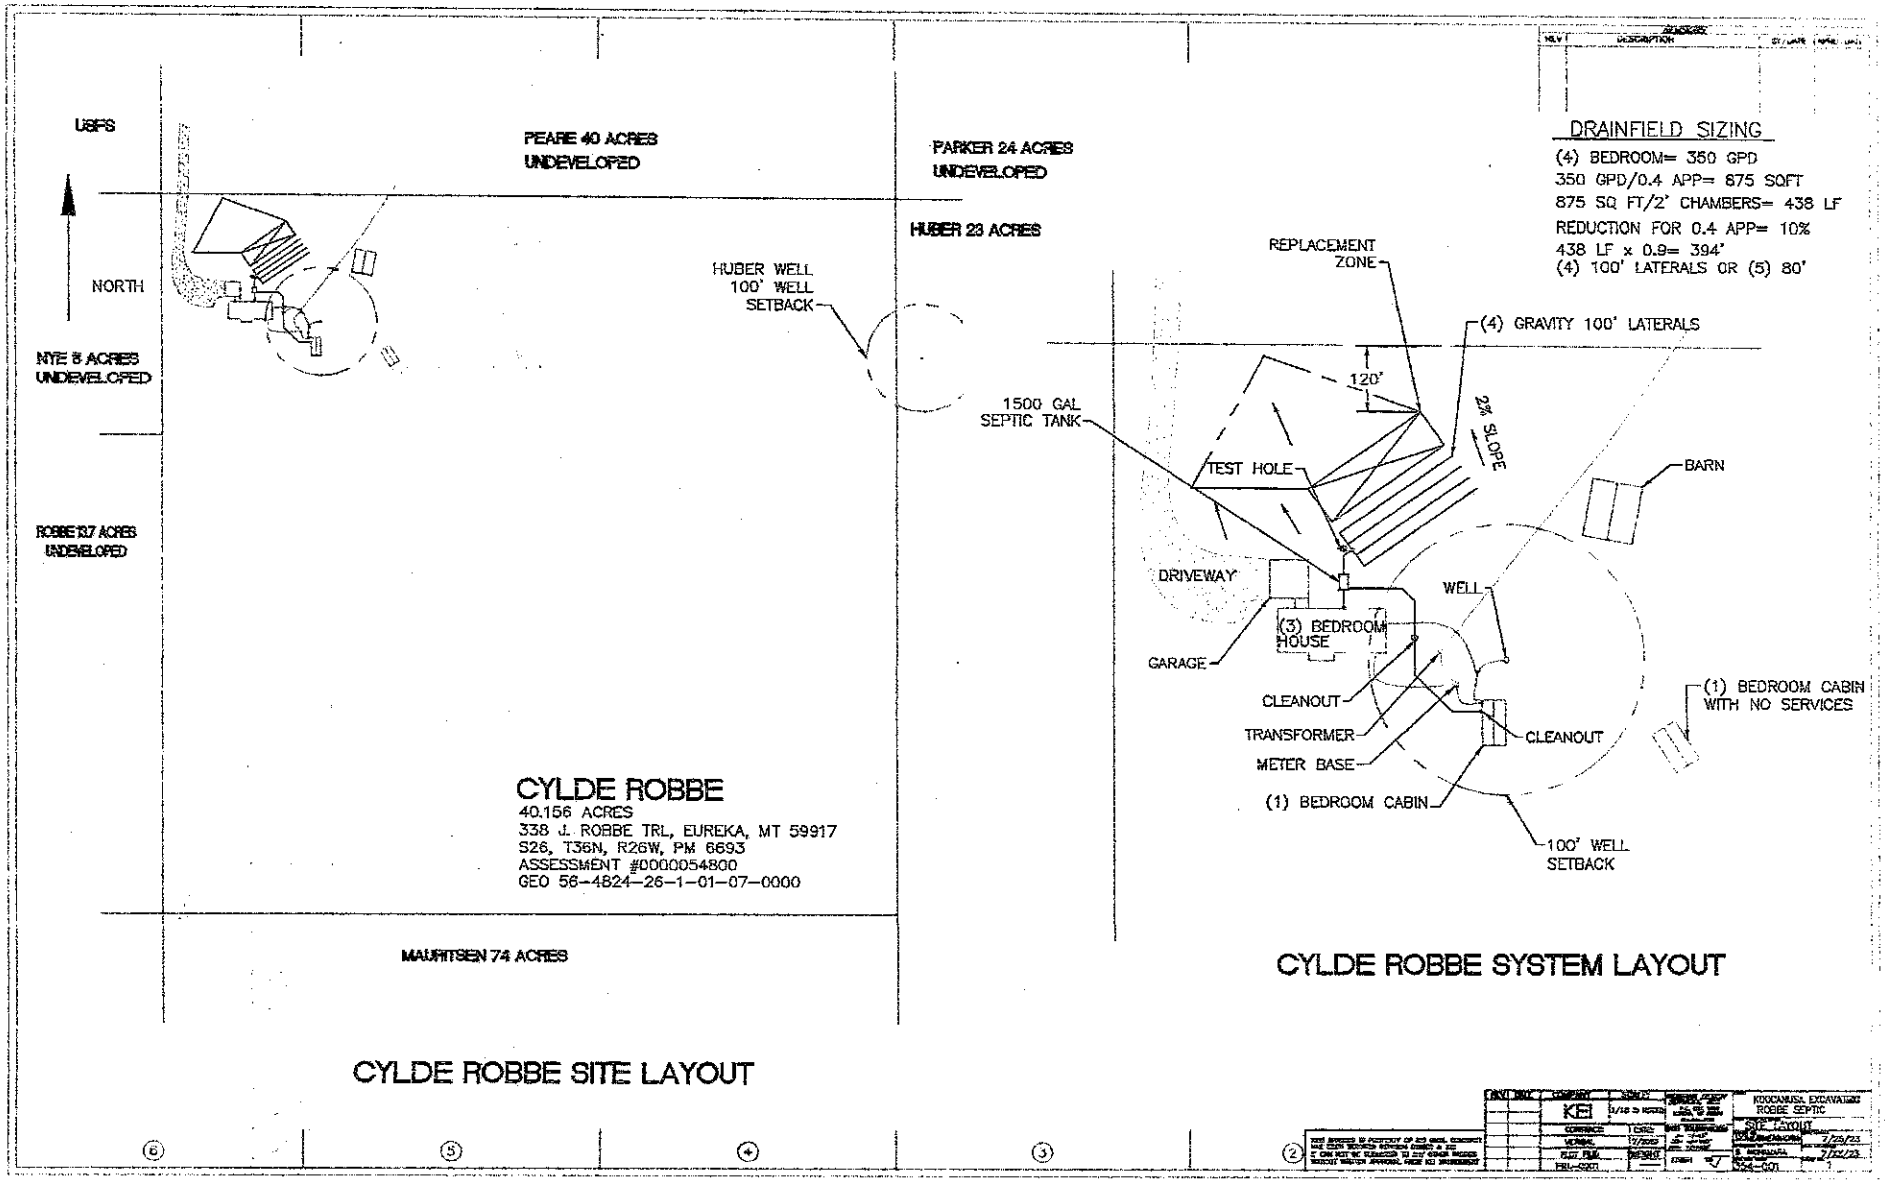
This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg Date: 5/10/24

____ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.


USFS
NORTH
PEARE 40 ACRES
UNDEVELOPED
PARKER 24 ACRES
UNDEVELOPED
HUBER 23 ACRES
HUBER WELL
100' WELL
SETBACK
NYE 5 ACRES
UNDEVELOPED
ROBBE 12.7 ACRES
UNDEVELOPED
MAURITSEN 74 ACRES
CYLDE ROBBE
40.156 ACRES
338 J. ROBBE TRL, EUREKA, MT 59917
S26, T36N, R26W, PM 6693
ASSESSMENT #0000054800
GEO 56-4824-26-1-01-07-0000
CYLDE ROBBE SITE LAYOUT
DRAINFIELD SIZING
(4) BEDROOM= 350 GPD
350 GPD/0.4 APP= 875 SQFT
875 SQ FT/2' CHAMBERS= 438 LF
REDUCTION FOR 0.4 APP= 10%
438 LF x 0.9= 394'
(4) 100' LATERALS OR (5) 80'
REPLACEMENT
ZONE
(4) GRAVITY 100' LATERALS
120'
2% SLOPE
1500 GAL
SEPTIC TANK
TEST HOLE
BARN
DRIVEWAY
WELL
(3) BEDROOM
HOUSE
GARAGE
CLEANOUT
TRANSFORMER
METER BASE
(1) BEDROOM CABIN
CLEANOUT
(1) BEDROOM CABIN
WITH NO SERVICES
100' WELL
SETBACK
CYLDE ROBBE SYSTEM LAYOUT
KOOCANUSA EXCAVATING
ROBBE SEPTIC
SITE LAYOUT
7/25/23
7/25/23
⑥
⑤
④
③
②