

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

CERTIFIED CORNER RECORDATIONCorner: Sec. Cor.; Secs. 26, 27, 34, 35 T. 26N. R. 29W. P.M.M. Lincoln County

GLO 1903 Record: Set limestone. Established 4 bearing trees.

1971

BLM Record: Found stone & 3 bearing trees.

Set iron post, 30" long, 2 1/2" dia., 24" in the ground, with brass cap, from which:

Original BTs:

An 18" fir, bears N23°05'E, 94 lks (62.0 ft.), marked T26N R29W S26 BT

An 18" larch stump, bears S15°E, 80 lks (52.8 ft.), marked BT. (GLO Record S23-1/2°E)

A 12" larch, bears S27°45'W, 8 lks (5.3 ft.), marked w/ overgrown blaze

New BTs:

A 9" spruce, bears S79 3/4°E, 31 lks (20.5 ft.), marked T26N R29W S35 BT

A 9" larch, bears N53 1/2°W, 54 lks (35.6 ft.), marked T26N R29W S27 BT

Buried orig. stone alongside post.

2009 Found: We find a standard BLM monument with a 3 1/4" brass cap, firmly set in good condition, 1" above the ground, marked as shown below, from which:

A 26" fir, bears N23°05'E, 62.6 ft., with scribing visible

A 10" spruce stump, 5 ft. high, bears S79 3/4°E, 21.2 ft., with scribing visible

A 22" larch, bears S19°W, 5.3 ft., with overgrown blaze


A 14" larch, bears N53 1/2°W, 35.6 ft., with overgrown blaze

A larch stump, bears S15°E, 52.8 ft., no markings visible.

2009 Perpetuation: From the found monument we establish the following reference monument:
An 18" Douglas fir, bears N70°E, 29.8 ft., scribed T26NR29WS26BT

We paint red bands on the new bearing trees, and attached USFS signs 54-3 & 54-9.

SEE COS NO. 3992

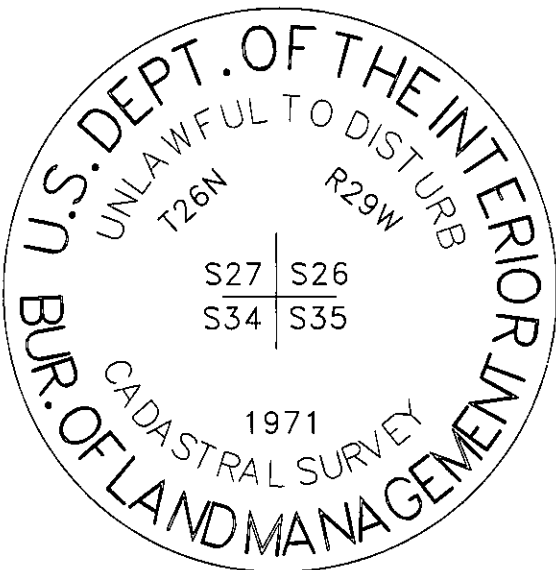
	<p>CERTIFICATION</p> <p>I, <u>Chad R. Breuer</u> certify the information shown herein is true and correct.</p> <p><i>Chad R. Breuer</i> Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by <u>Ken E Jenkins</u> under my direction in compliance with the Uniform Corner Recordation Act" (70-223101, M.C.A.)</p> <p><i>Ken E Jenkins</i> Signature of Surveyor & Seal</p> <p>Date: <u>9/2009</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-09</u></p>
SKETCH OF CORNER	

Office of Clerk and Recorder, County of _____ This "corner record" was filed for record on _____
was noted on the cross-index pl _____
book No. _____

224853 BOOK: CCR CC&R'S PAGE: 11479 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 03/05/2010 9:21 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: *Leanne Lauer*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

Cross Index No. V-17 T. 26N R. 29W PMM

Sec. 34



● Corner this sheet