LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Permit # 23- 5564

Issue Date: 06/30/2023 Expiration Date: 06/29/2024

Property Owner: Mike & Maggie Salik

Mailing Address: [redacted]

Telephone: [redacted] E-mail: [redacted]

Installer: Bradley Persson License #: 159

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of gravity system with 2 laterals @ 64' each, chambers

Parcel Description:

Legal: PINE BAY NO 2, S15, T36 N, R28 W, SECTION 15-22, LOT 45, ACRES 0.0505

Property Address: 20 Pine Cone Ln., Rexford, MT 59930 Assessment Code: 5564

DEQ COSA: 27-77-K855 Date: 8/17/77

Approved Design Criteria: Installation of gravity system with chambers and 2 laterals @64'.

# of Bedrooms: 3 Septic Tank Size: 1000 gallons Trench Width: 24"

# of Laterals: 2 Length of Laterals: 64' each Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, SIT

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: Robin Blumberg *Date:* 12/18/23

✓ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

SV

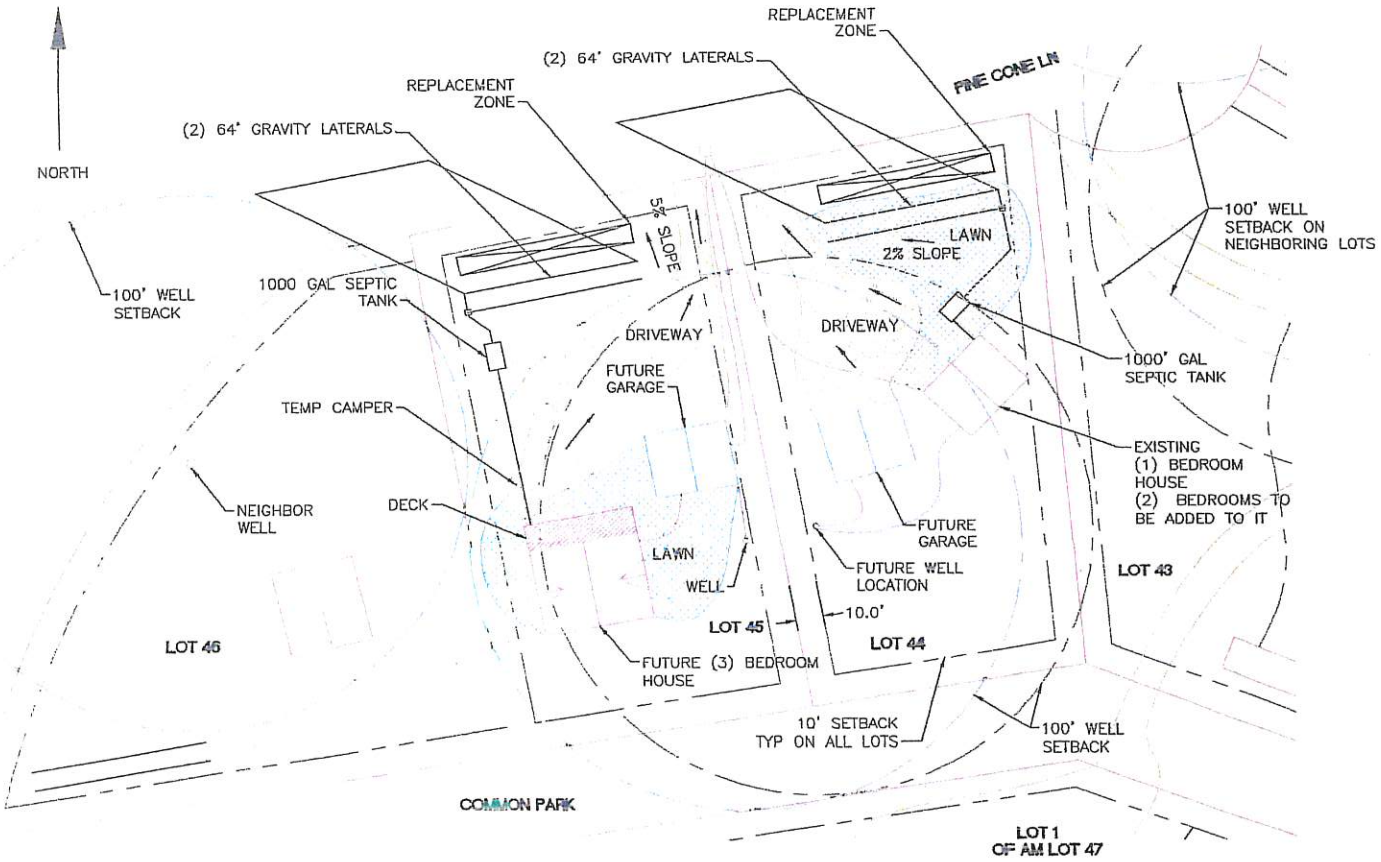

DRAINFIELD SIZING

85 SQFT/BEDROOM PER COSA
(3) BEDROOM= 255 SQFT
255 SQ FT/2' CHAMBERS= 128 LF
128 LF/ 2 LATERALS= 64' LATERALS

LOT 44

0.588 ACRES
40 PINE CONE LANE, REXFORD, MT 59930
S15, T36N, R28W, PINE BAY NO 2
ASSESSMENT #0000005430
GEO 56-4822-15-1-07-05-0000

LOT 45

0.505 ACRES
20 PINE CONE LANE, REXFORD, MT 59930
S15, T36N, R28W, PINE BAY NO 2
ASSESSMENT #0000005564
GEO 56-4822-15-1-07-04-0000

MIKE AND MAGGIE SALIK SITE LAYOUT

MDS
MONTANA DESIGN SERVICES, INC.
SALIK SEPTIC
SITE LAYOUT
6/19/23
6/19/23
312-001