INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
- 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories
- 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

CERTIFIED CORNER RECORDATION

Corner: <u>C-N-N 1/64th</u>; Sec. 34

T. <u>26N.</u>

R. 29W. P.M.M. Lincoln County

Record:

No previous record No evidence found

2009 Perpetuation:

At a position established by the survey and section breakdown of Section 34, we set a 5/8"x30" rebar, 26" in the ground affixed with a 31/4" U.S.F.S. alum. cap marked as shown below, from which we establish the following reference monuments:


A 6" Douglas fir, bears S53°E, 3.3 ft., scribed CNN 1/64 S34 BT A 6" Douglas fir, bears S43°W, 4.2 ft., with an "X" cut at breast height

We build a mound of stone around the monument.

We set galvanized steel posts with U.S.F.S. decals P54-1 and P71-10, 0.9 ft., east and 0.9 ft., south of the monument.

We paint red bands on the bearing trees and attach USFS signs 54-3 & 54-9.

SEE COS NO. <u>3992</u>

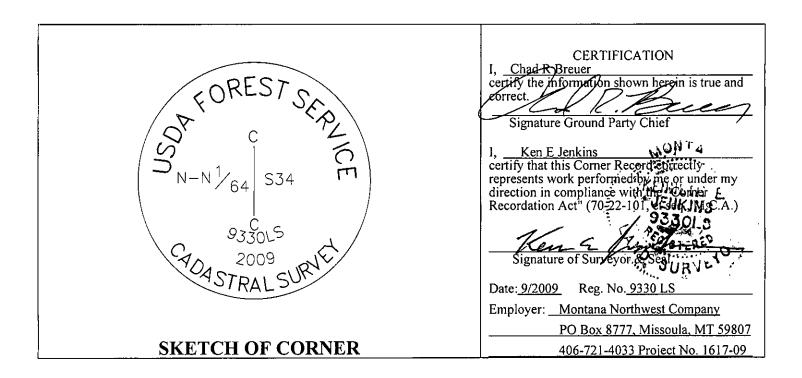

	Sec. 34	
Office of Clerk and Recorder, County of This "corner		_
record" was filed for record on 224856 BOOK: CCR CCER'S PAGE: 11482 Pages: 1 was noted on the cross-index plat: GRANTE OF MONTANA LINCOLN COUNTY		_
book No. RECORDED: 03/05/2010 9:24 KOI: CCER'S		
TAMMY D. LAUER CLERK AND RECORDER FEE: \$0.00 BY: LENGUE CLERK AND RECORDER FEE: \$0.00 BY: LENGUE CLERK AND RECORDER	<u> </u>	

Cross Index No. $\underline{V.5-15}$ 7

<u>V.5-15</u> T. <u>26N</u> R <u>29W</u> PMM

Corner this sheet