

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

CERTIFIED CORNER RECORDATIONCorner: NW 1/16th; Sec. 34T. 26N.R. 29W. P.M.M. Lincoln County

Record: No previous record
Found: No evidence found

2009 Perpetuation: At a position established by the survey and section breakdown of Section 34, we set a 5/8"x30" rebar, 28" in the ground affixed with a 3 1/4" U.S.F.S. alum. cap marked as shown below, from which we establish the following reference monuments:

- A 10" Tamarack, bears N85°E, 36 ft., with an "X" cut at breast height
An 18" Douglas fir, bears S54°E, 17.2 ft., scribed NW 1/16 S34 BT


Monument falls in the flowline of a 5 ft. deep seasonal creek.

We set a 5/8"x30" rebar, 26" in the ground affixed with a 3 1/4" U.S.F.S. alum. cap for a witness point, 10.2 ft. East, of the NW 1/16th corner, marked as shown below.

We build a mound of stone around the monuments.

We set galvanized steel posts with U.S.F.S. decals P54-1 and P71-10, east and south of the monument at the NW 1/16th and a galvanized steel post with U.S.F.S. decals P54-1 and P71-10 east of the monument at the witness point to the NW 1/16th.

We paint red bands on the bearing trees and attach USFS signs 54-3 & 54-9.

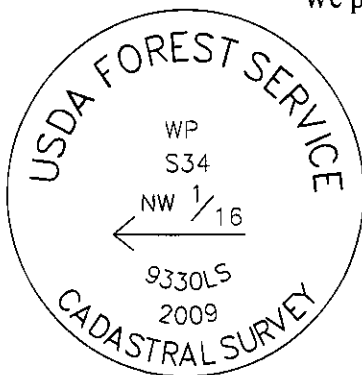SEE COS NO. 3992

	CERTIFICATION I, <u>Chad R. Breuer</u> certify the information shown herein is true and correct. Signature Ground Party Chief
	I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.) Signature of Surveyor & Seal Date: <u>9/2009</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-09</u>

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____ This "corner


record" was filed for record on _____

was noted on the cross-index plat:

book No. _____

224862 BOOK: CCR CC&R'S PAGE: 11488 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 03/05/2010 9:30 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY:
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA
Cross Index No. W-14 T. 26N R 29W PMM

Sec. 34



● Corner this sheet