## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.

2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.

3. Description of monument and accessories set to perpetuate the corner position.

4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,

5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

## CERTIFIED CORNER RECORDATION

Corner: C-N-S-NW 1/256th; Sec. 34

T. 26N.

R. 29W. P.M.M. Lincoln County

Record: Found:

No previous record No evidence found

2009 Perpetuation:


At a position established by the survey and section breakdown of Section 34, we set a 5/8"x30" rebar, 26" in the ground with a 3 1/4" U.S.F.S. alum cap, marked as shown below, from which we establish the following reference monuments:

An 11" Douglas fir, bears N88°E, 16.2 ft., with an "X" cut at breast height A 14" Douglas fir, bears N41°W, 23.6 ft., scribed CNSNW 1/256 S34 BT

We build a mound of stone around the monument.

We paint red bands on the bearing trees and attach USFS signs 54-3 & 54-9.

SEE COS NO. 3992

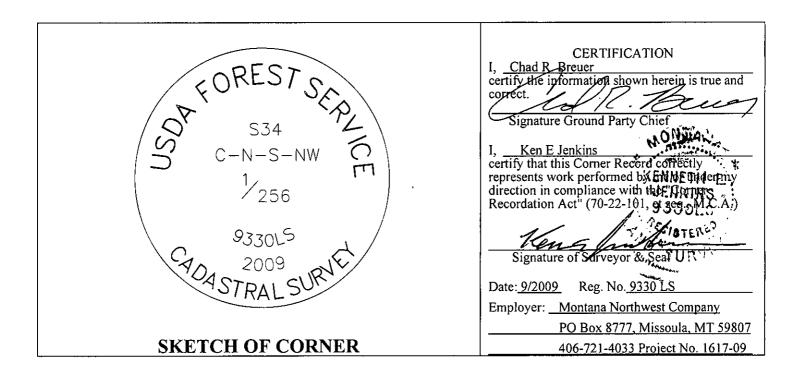

		Sec. 34	
Office of Clerk and Recorder, Cou	nty of This "corner		
record" was filed for record on	224865 BOOK: CCR CCER'S PAGE: 11491 Pages: 1		
was noted on the cross-index plat:	STATE OF MONTANA LINCOLN COUNTY RECORDED: 03/05/2010 9:33 KOI: CCGR'S		
book No.	TAMMY D. LAUER CLERK AND RECORDER  FEE: \$0.00 BY-  TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA		

Cross Index No.

W.25-14 T. 26N R 29W PMM

Corner this sheet