INSTRUCTIONS

- 1. Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
- 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of
- 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

CERTIFIED CORNER RECORDATION

Corner: SW-NW 164th; Sec. 34

T. 26N.

R. 29W. P.M.M. Lincoln County

Record:

No previous record

Found:

No evidence found

2009 Perpetuation:

At a position established by the survey and section breakdown of Section 34, we set a 5/8"x30" rebar, 26" in the ground affixed with a 3 1/4" U.S.F.S. alum cap, marked as shown below, from

which we establish the following reference monuments:


A 7" Lodgepole pine, bears N40°E, 5.8 ft., scribed SWNW 1/64 S34 BT A 7" Lodgepole pine, bears S63°E, 17.2 ft., with an "X" cut at breast height

We build a mound of stone around the monument.

We set galvanized steel posts with U.S.F.S. decals P54-1 and P71-10, 0.6 ft., north and 0.8 ft., west of the monument.

We paint red bands on the bearing trees and attach U.S.F.S. signs 54-3 & 54-9.

SEE COS NO. 3992

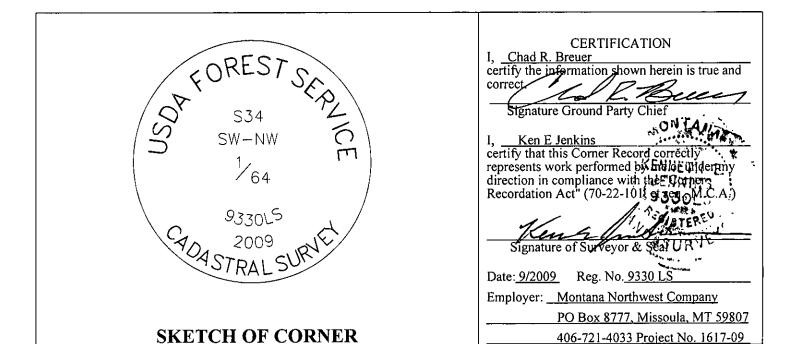

Office of Clerk and Recorder, C	County of	This "corner
record" was filed for record on	224867 BOOK: CCR CC&R	S PAGE: 11493 Pages: 1
was noted on the cross-index p	STATE OF MONTANA LINCOLN CO RECORDED: 03/05/2010 9:35	
book No.	TAMMY D. LAUER CLERK AND FEE: \$0.00 BY: TO: MORTANA HORTHWEST COMPANY	P.O. BOX 8777, MISSOULA, MONTANA
	Cross Index No. W.5	<u>-13.5</u> T. <u>26N</u> R <u>29W</u> PMM

Sec. 34

Corner this sheet