LINCOLN COUNTY HEALTH DEPARTMENT Permit #24-53644
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 07/13/2023 (rev. 8/16/2023) robin oked

~~Expiration Date:~~ ~~07/12/2024~~ 8-16-2024

Property Owner: Tim Stowman

Mailing Address: [redacted]

Telephone: E-mail:

Installer: Tally Hoe License #: 1

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of gravity system with 2 laterals @ 100', chambers

Parcel Description:

Legal: S32, T37 N, R31 W, C.O.S. BK263 PG651, ACRES 5, LOT 6 IN HES 481 *53644* SPLIT FROM #12360

Property Address: 785 Bengston Ln., Troy, MT 59935 Assessment Code: 53644

DEQ COSA: EQ# Date:

Approved Design Criteria:

# of Bedrooms: 3 Septic Tank Size: 1000 gallons Trench Width: 36"

# of Laterals: 2 Length of Laterals: 100' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Kathi Hooper, RS

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

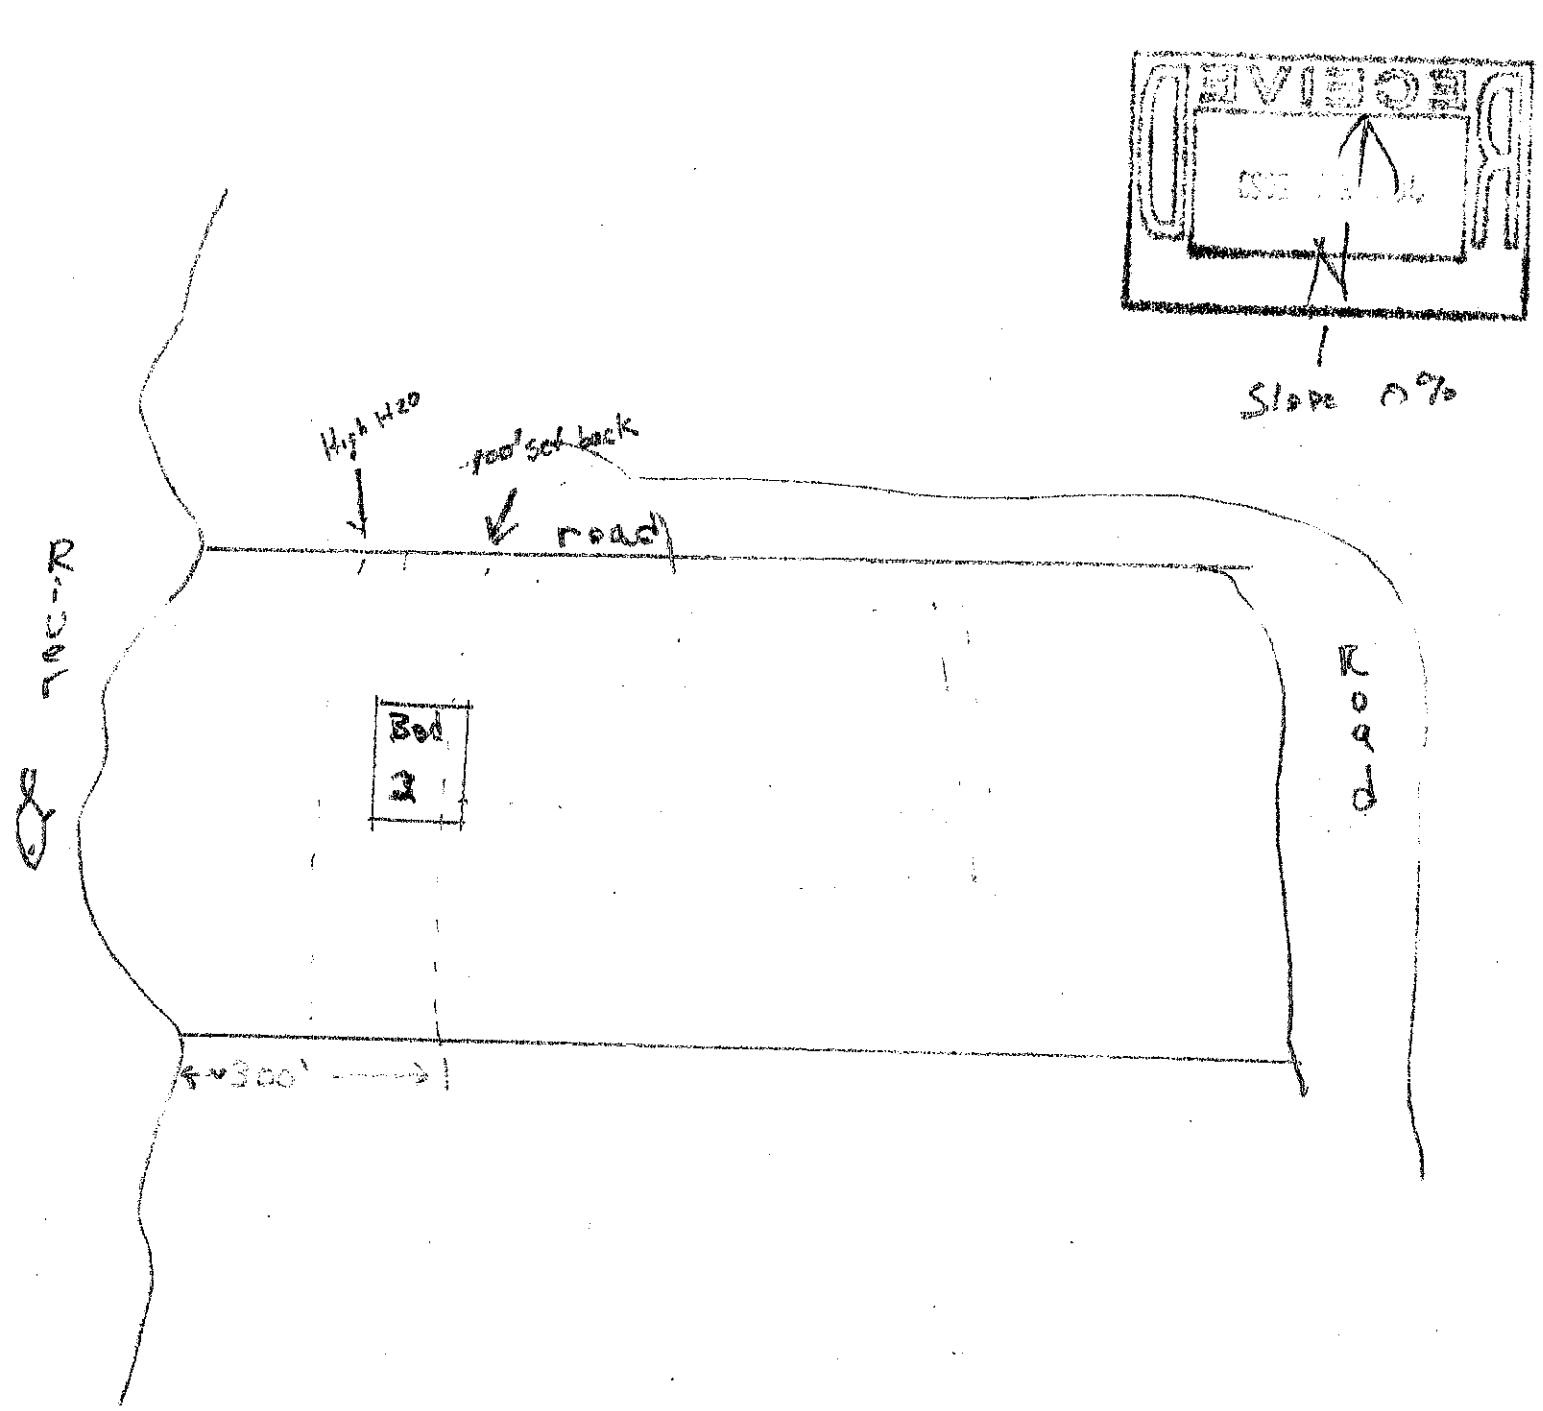
This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Thomas J Cole Date: 8-7-24

___ Lincoln County Health Department (LCHD) ___ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.


High H2O
100' set back
road
River
Road
Bed
1
~300'
Slope 0%