


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner NE Corner Section 36 T. 26N R. 29W P.M.M. Lincoln County

1. 80 chains: Set a sandstone 16 X 14 X 8 inches, 11 inches in ground, for corner of Sections 25,30,31 and 36, marked with 1 notch on S. and 5 notches on N. edge; from which a Pine 8 ins. diam., bears N 46°18'E., 212 links distance, marked T 26 N. R.28 W S 30 B.T. A Pine, 6 inches diameter, bears S 20°20'E., 204 links distance marked T 26 N.,R. 28 W S 31 B.T. A Fir, 6 inches diameter, bears S 25°W., 242 links distance, marked T 26 N.,R. 29 W S 36 B.T. A Fir, 8 inches diameter, bears N 13°30'W., 144 links distance, marked T 26 N.,R 29W S 25 B.T.
2. Searched diligently for corner as (it was apparent) had others without turning up any evidence.
3. I set a 3" aluminum monument on a 30" pipe at single proportionate distance on line between the East ¼ corner for Section 36 T.26N.,R.29 W.,P.M.M. and the East ¼ corner for Section 25 T 26 N.,R.29W.,P.M.M. from which an 18" Fir bears N 64° W37.8 feet scribed S 25 B.T. & posted. A 12" Fir bears N 32°E 32.7 feet scribed S30 B.T. & posted. A 16" Fir bears S 46°E 18.2 feet scribed S 31 B.T. & posted. A 6" Fir bears S 72°W 13.3 feet scribed S 36 B.T. & posted. A location poster and attention poster (54-4) attached to a 3" Fir which bears S 16°W 17.0 feet from corner monument.



Set 3" aluminum monument marked as shown

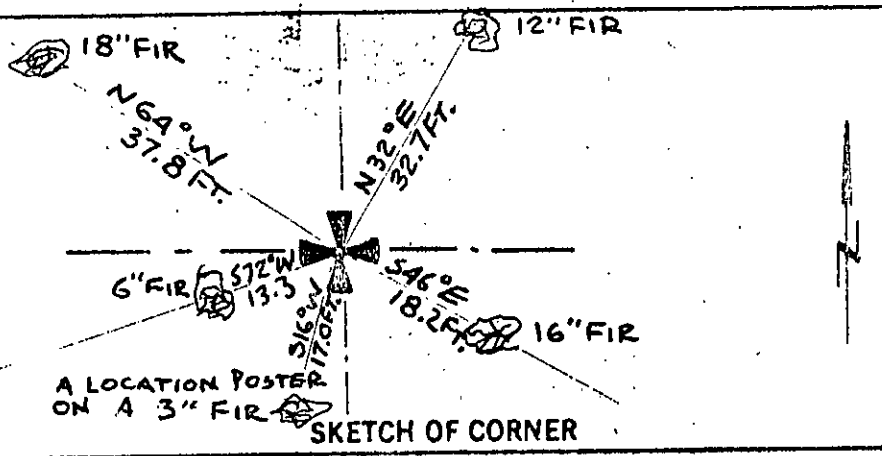

CERTIFICATION

I, \_\_\_\_\_, certify the information shown herein is true and correct.

Signature Ground Party Chief:

Jack H. Ninneman

I, Jack H. Ninneman, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Co.:

Jack H. Ninneman

Date: 10/21/81 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the November 5<sup>th</sup> day of 1981, was noted on the cross-index plat and is assigned page No. 1350, in

No. 1 Cecilia L. Vaughn by Betty Conner Deputy

Sec. 36
