

INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner $\frac{1}{4}$ $\frac{S4}{S9}$ T. 26N R. 29W P.M.M. Lincoln County

Date of Work: Sept. 27, 1982

1. (a) 1903 - B.L.M. Original record; Set a limestone, 12x10x5 ins., 8 ins. in the ground, for $\frac{1}{4}$ Sec. Cor. marked $\frac{1}{4}$ on N. face; from which:
 - A Pine, 14 ins. diam., bears S24°30'E, 62 lks. dist., marked $\frac{1}{4}$ S9 BT.
 - A Pine, 12 ins. diam., bears N42°30'W, 6 lks. dist., marked $\frac{1}{4}$ S4 BT.
 - (b) 1964 - B.L.M. record; as determined from the original bearing trees. At the corner point; Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 27 ins. in the ground, with brass cap marked as shown below. From which:
 - The original bearing trees:
 - A Pine, 16 ins. diam., bears S14½°E, 62 lks. dist., mkd. with an overgrown blaze. (Record: S24½°E, 62 lks.)
 - A Pine, 16 ins. diam., bears N42½°W, 6 lks. dist., mkd. $\frac{1}{4}$ S4 BT. (Record)
 - The new bearing tree:
 - A Pine, 30 ins. diam., bears N3°E, 39 lks. dist., mkd. $\frac{1}{4}$ S4 BT.
 2. 1982 - Found a $2\frac{1}{2}$ " iron post approx. 6"-8" above ground with B.L.M. brass cap marked as shown below. From which:
 - A Pine, 17 ins. diam., now a dead snag, bears N42½°W, 6 lks. dist., mkd. with a partially overgrown blaze, tagged with location poster, sawn off 6'± above ground. (Record)
 - A Pine, 20 ins. diam., bears S14½°E, 62 lks. dist., mkd. with a partially opened blaze with visible scribing. (Record)
 - A Pine, 30 ins. diam., now a dead stump, bears N3°E, 39 lks. dist., mkd. $\frac{1}{4}$ S4 BT with visible open blaze pitched over. (Record)
- Posted by: ART Date: 1964
3. No additional accessories set to perpetuate monument.

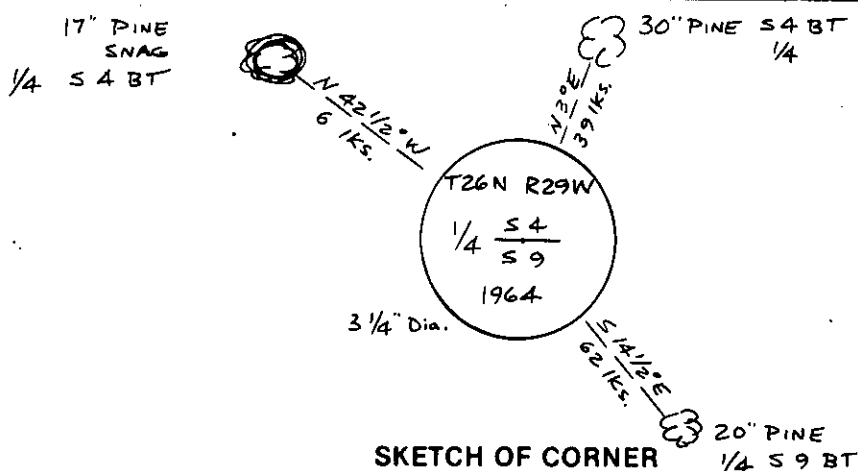

SKETCH OF CORNER

CERTIFICATION
L.A. Dolezal

certify the information shown herein is true and correct.

L.A. Dolezal
Signature of Party Chief

Melvin D. Lauteren


certify that this Corner Record correctly represents work performed by me or under my direct or indirect supervision in compliance with the Corner Recordation Act (70-22-101) (M.C.A.)
Melvin D. Lauteren
Signature of Surveyor & Seal

Date: 10/15/82 Reg. No. 4232 S

Employer: Kootenai Engineering, Inc.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" Sec. 9-T26N-R29W-PMM
was filed for record on the 15 day of OCT 1982, was noted on the cross-index plat and
is assigned page No. 1960, in book No. Eleanor L. Vaughn by Betty Conces
County Official deputy

Cross Index No. 1. 26 R. 29 PMM



• - corner this sheet