

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner S8 | S9 T. 26 N R. 29 W P.M.M. Lincoln County  
Date of Work: Sept. 29th, 1982

1. (a) 1903 - B.L.M. Original record; Set a boulder, 14x6x6 ins., 10 ins. in the ground, for  $\frac{1}{4}$  Sec. Cor., marked  $\frac{1}{4}$  on W. face; from which:  
A Tamarack, 16 ins. in diam., bears S13°45'E, 38 lks. dist., marked  $\frac{1}{4}$  S9 BT.  
A Fir, 10 ins. diam., bears S14°15'W, 34 lks. dist., marked  $\frac{1}{4}$  S8 BT.
- (b) 1964 - B.L.M. record; found a granite stone, 14x6x6 ins., firmly set and mkd.  $\frac{1}{4}$  on the W face, and witnessed by the remains of one of the original bearing trees. At the corner point. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$  ins. diam., 27 ins. in the ground, with brass cap marked as shown below; from which:

The remains of the original bearing tree:

A stump, 20 ins. diam., bears S13-3/4°E, 38 lks. dist. (Record)

The new bearing trees:

A larch, 9 ins. diam., bears S43°E, 27 lks. dist., mkd.  $\frac{1}{4}$  S9 BT.

A larch, 5 ins. diam., bears S59°W, 34 lks. dist., mkd.  $\frac{1}{4}$  S8 BT.

Bury the original stone alongside of the iron post.

2. 1982 - Found a 2 $\frac{1}{2}$ " iron post, approx. 8 ins. above the ground with B.L.M. brass cap marked as shown below; from which:

A Larch stump, 20 ins. diam., bears S13-3/4°E, 38 lks. dist., with visible marks  $\frac{1}{4}$  BT on fallen log next to stump. (Record)


A Larch, 12 ins. diam., bears S43°E, 27 lks. dist., mkd. with overgrown blaze. (Record)

A Larch, 7 ins. diam., bears S59°W, 34 lks. dist., mkd. with overgrown blaze. (Record)

Posted by: BLM/USFS

Date: '64

3. No additional accessories set to perpetuate monument.

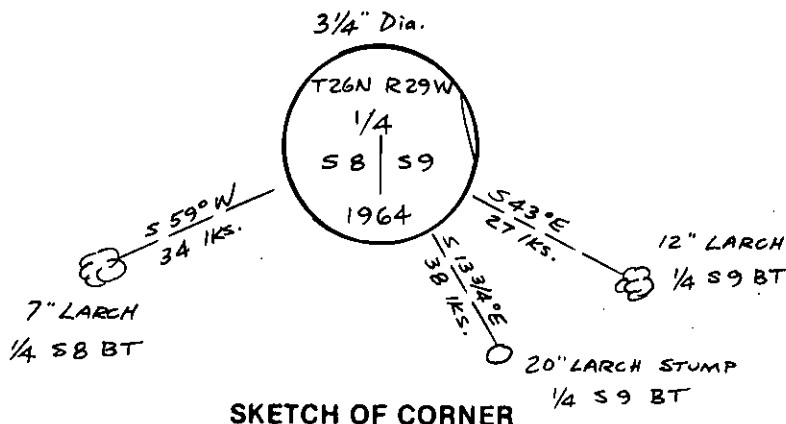

SKETCH OF CORNER

## CERTIFICATION

I, L. A. Dolezal

certify the information shown herein is true and correct.

*L.A. Dolezal*  
Signature Ground Party Chief

I, Melvin D. Lauteren

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-201, M.C.A.)  
*Melvin D. Lauteren*  
Signature of Surveyor & Seal

Date: 10/15/82

Reg. No.

4232 S


Employer: KOOTENAI ENGINEERING, INC.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the 15 day of OCT 1982, was noted on the cross-index plat and is assigned page No. 1961, in book No. Eleanor L. Vaughn by Betty L. Conces  
County Official deputy

Cross Index No.

T. 26 N R. 29 W P.M.M.

Sec. 9-T26N-R29W-PMM

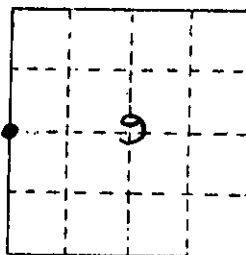

• corner this sheet