Permit # 24-50 243

LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 03/12/2024(Renewal) Expiration Date: 03/11/2025 1st Permit 7/14/2021 2nd 10/3/2022

Property Owner: Corey Wilson

Mailing Address: [redacted]

Installer: Terry Oedewaldt License #: 2

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new gravity septic system.

Legal: QUARTZ MOUNTAIN ESTATE, S24, T31 N, R32 W, LOT 12, ACRES 7.516, PM 7039

Property Address: Quartz Mountain Estate Lot 12 Assessment Code: 56243

DEQ COSA: E.Q.#08-2796 & EQ#24-1571 Date: 01/06/2009 & 02/20/2024

Approved Design Criteria: Installation of new gravity system with 4 laterals @ 84' with reduction given for chambers.

# of Bedrooms: 3	Septic Tank Size: 1000	Trench Width: 24"
# of Laterals: 4	Length of Laterals: 84'	Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* 5/16/24


____ Lincoln County Health Department (LCHD) ✓ Licensed Installer w/ approval of LCHD


This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

SV

WILSON 5/16/24

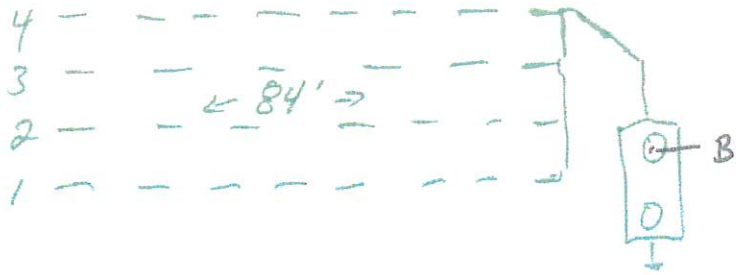

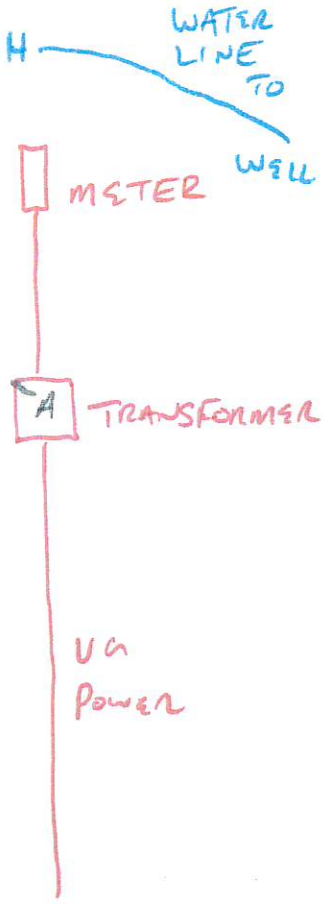

DRAINFIELD LOCATION

	A	B
1S	47'4	16'8
1E	127'11	99'2
2S	51'2	15'6
2E	128'8	99'6
3S	55'10	17'8
3E	130'1	99'6
4S	61'	21'1
4E	132'	99'10

TOP OF DRAINFIELD CHAMBERS IS 3' 4 1/2 BELOW THE CENTER OF THE FILTER TANK LID (B)