

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION


Corner 

S 9	S 10
S 16	S 15

 T. 26 N R. 29 W P.M.M. Lincoln County  
Date of work: Sept. 28th, 1982

1. (a) 1903 - B.L.M. Original record;  
Set a fir post, 3 ft. long, 4 ins. sq., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked:  
T 26 N S10 on NE,  
R 29 W S15 on SE,  
S 16 on SW and  
S 9 on NW faces; with 4 notches on S, and 3 notches on E edge; from which;  
A Tamarack, 20 ins. diam., bears N13°30'E, 21 lks. dist., marked T26N R29W S10 BT.  
A Pine, 6 ins. diam., bears S30°45'E, 31 lks. dist., marked T26N R29W S15 BT.  
A Pine, 8 ins. diam., bears S12°W, 27 lks. dist., marked T26N R29W S16 BT.  
A Fir, 8 ins. diam., bears N57°15'W., 17 lks. dist., marked T26N R29W S9BT.
- (b) 1964 - B.L.M. record; found a disintegrated wooden post, firmly set in the ground, and witnessed by the remains of one of the original bearing trees. At the corner point. Set an iron post, 30 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap marked as shown below; from which:  
The remains of the original bearing tree:  
A dead larch, 22 ins. diam., bears N13½°E, 21 lks. dist., with illegible scribing. (Record)  
The new bearing trees:  
A Pine, 7 ins. diam., bears N31°E, 19 lks. dist., mkd. T26N R29W S10BT.  
A Pine, 7 ins. diam., bears S44°E, 7 lks. dist., mkd. T26N R29W S15BT.  
A Pine, 6 ins. diam., bears S77½°W, 19 lks. dist. mkd. T26N R29W S16BT.  
A Pine, 5 ins. diam., bears N12°W, 15 lks. dist., mkd. T26N R29W S9BT.  
Bury the remains of the original wooden post alongside of the iron post.
2. 1982 - Found a 2½" iron post, approx. 8 ins. above ground with B.L.M. brass cap marked as shown below; from which:  
A dead Larch, 22 ins. diam., bears N13½°E, 21 lks. dist., with illegible scribing. (Record)  
A Pine, 8 ins. diam., bears N31°E, 19 lks. dist., mkd. T26N R29W S10 BT. (Record)  
A Pine, 8 ins. diam., bears S44°E, 7 lks. dist., mkd. T26N R29W S15 BT. (Record)  
A Pine, 7 ins. diam., bears S77½°W, 19 lks. dist., mkd. T26N R29W S16 BT. (Record)  
A Pine, 6 ins. diam., bears N12°W, 15 lks. dist., mkd. T26N R29W S9 BT. (Record)

Posted by: B.L.M./U.S.F.S. Dated: '64 ((OVER))

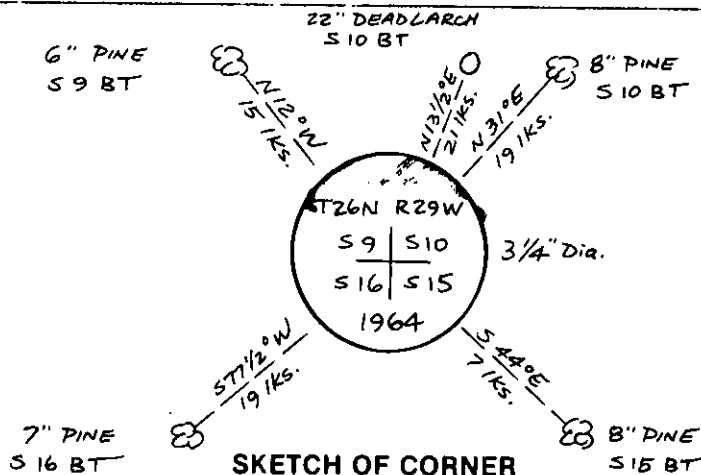

SKETCH OF CORNER

CERTIFICATION  
I, L. A. Dolezal  
certify the information shown herein is true and correct  
*L. A. Dolezal*  
Signature of Land Party Chief  
I, Melvin D. Lauteren  
certify that this Corner Record correctly represents work performed by me or under my direct supervision in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.)  
*Melvin D. Lauteren*  
Signature of Surveyor & Seal  
Date: 10/15/82 Reg. No. 4232 S.  
Employer: KOOTENAI ENGINEERING, INC.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" Sec. 9-T26N-R29W-PMM  
was filed for record on the 15 day of OCT 19 82, was noted on the cross-index plat and  
is assigned page No. 1966, in book No. Eleanor L. Vaughn by Betty Concas

County Official

deputy

Cross Index No.

T. 26 R. 29

PMM

• corner this sheet