

## INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner  $\frac{1}{4}$   $\frac{S 9}{S 16}$  T. 26 N R. 29 W P.M.M. Lincoln County

Date of Work: sept. 27th, 1982

1. (a) 1903 - B.L.M. Original Record; Set a limestone, 12x10x9 ins., 8 ins. in the ground, for  $\frac{1}{4}$  Sec. Cor., marked  $\frac{1}{4}$  on N. face; from which:  
 A Pine, 14 ins. diam., bears S33°W, 13 lks. dist., marked  $\frac{1}{4}$  S 16 BT.  
 A Fir, 12 ins. diam., bears N1°10'W, 32 lks. dist., marked  $\frac{1}{4}$  S 9 BT.
- (b) 1964 - B.L.M. record; found a limestone, 12x10x9 ins., loosely set and marked  $\frac{1}{4}$  on the N. face, and witnessed by one of the original bearing trees. At the corner point; Set an iron post, 30 ins. long, 2 $\frac{1}{2}$  ins. diam. 27 ins. in the ground, with brass cap marked as shown below; from which:  
 The original bearing tree:  
 A Pine, 18 ins. diam., bears S33°W, 13 lks. dist., marked  $\frac{1}{4}$  S 16 BT. (Record)  
 The new bearing tree:  
 A Pine, 5 ins. diam., bears N6°W, 32 lks. dist., marked  $\frac{1}{4}$  S 9 BT.  
 Bury the original stone alongside of the iron post.
2. 1982 - Found a 2 $\frac{1}{2}$ " iron post approx. 8 ins. above ground with B.L.M. brass cap marked as shown below; from which:  
 A Pine, 22 ins. diam., bears S33°W, 13 lks. dist., mkd.  $\frac{1}{4}$  S16 BT (Record)  
 A Pine, 7 ins. diam., bears N6°W, 32 lks. dist., mkd.  $\frac{1}{4}$  S9 BT (Record)  
 Posted by: ART Date: 1964
3. No additional accessories set to perpetuate monument.

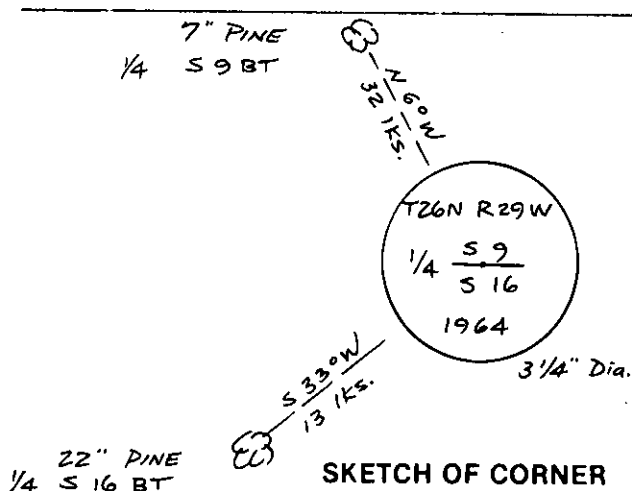

CERTIFICATION  
 I, L.A. Dolezal

certify the information shown herein is true and correct.

*L.A. Dolezal*  
 Signature Ground Party Chief  
 I, Melvin D. Lauteren

certify that this Corner Record correctly represents work performed by me or under my direct supervision in compliance with the "Corner Recordation Act" (70-2210)  
*Melvin D. Lauteren*  
 Signature of Surveyor & Seal

Date: 10/15/82 Reg. No. 4232 S

Employer: Kootenai Engineering, Inc.


Office of Clerk and Recorder, County of LINCOLN. This "corner record" Sec. 9T26N-R29W-PMM  
 was filed for record on the 15 day of OCT 19 82, was noted on the cross-index plat and  
 is assigned page No. 1967, in book No. Eleanor L. Vaughn by Betty L. Gonce

County Official *deputy*

Cross Index No.

T. 26 R. 29

P.M.M.



• - corner this sheet