LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 3/25/2023 Expiration Date: 3/24/2024

Property Owner: Robert Bowles

Mailing Address: [redacted]

Telephone: [redacted] Email: [redacted]

Installer: Logan Munts License #: 160

Proposed Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Gravity system with standard trenches, chambers

Parcel Description:

Legal: Schoolhouse Lake, Parcel 2, S29 T31N R33W, 20.02 acres

Property Address: Schoolhouse Lake Rd, Troy Assessment Code: 5745

Approved Design Criteria:

Bedrooms: 2 Septic Tank Sizes: 1000 gallons Trench Width: 24 inches

# of Laterals: 2 Length of Each Lateral: 75 lineal feet Trench Depth: 24-36 inches

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. 20% reduction for chambers. ANY CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kathi J. Hooper, R.S.*

NOTICE: The Department must be notified at least 3 business days [72 hours] prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

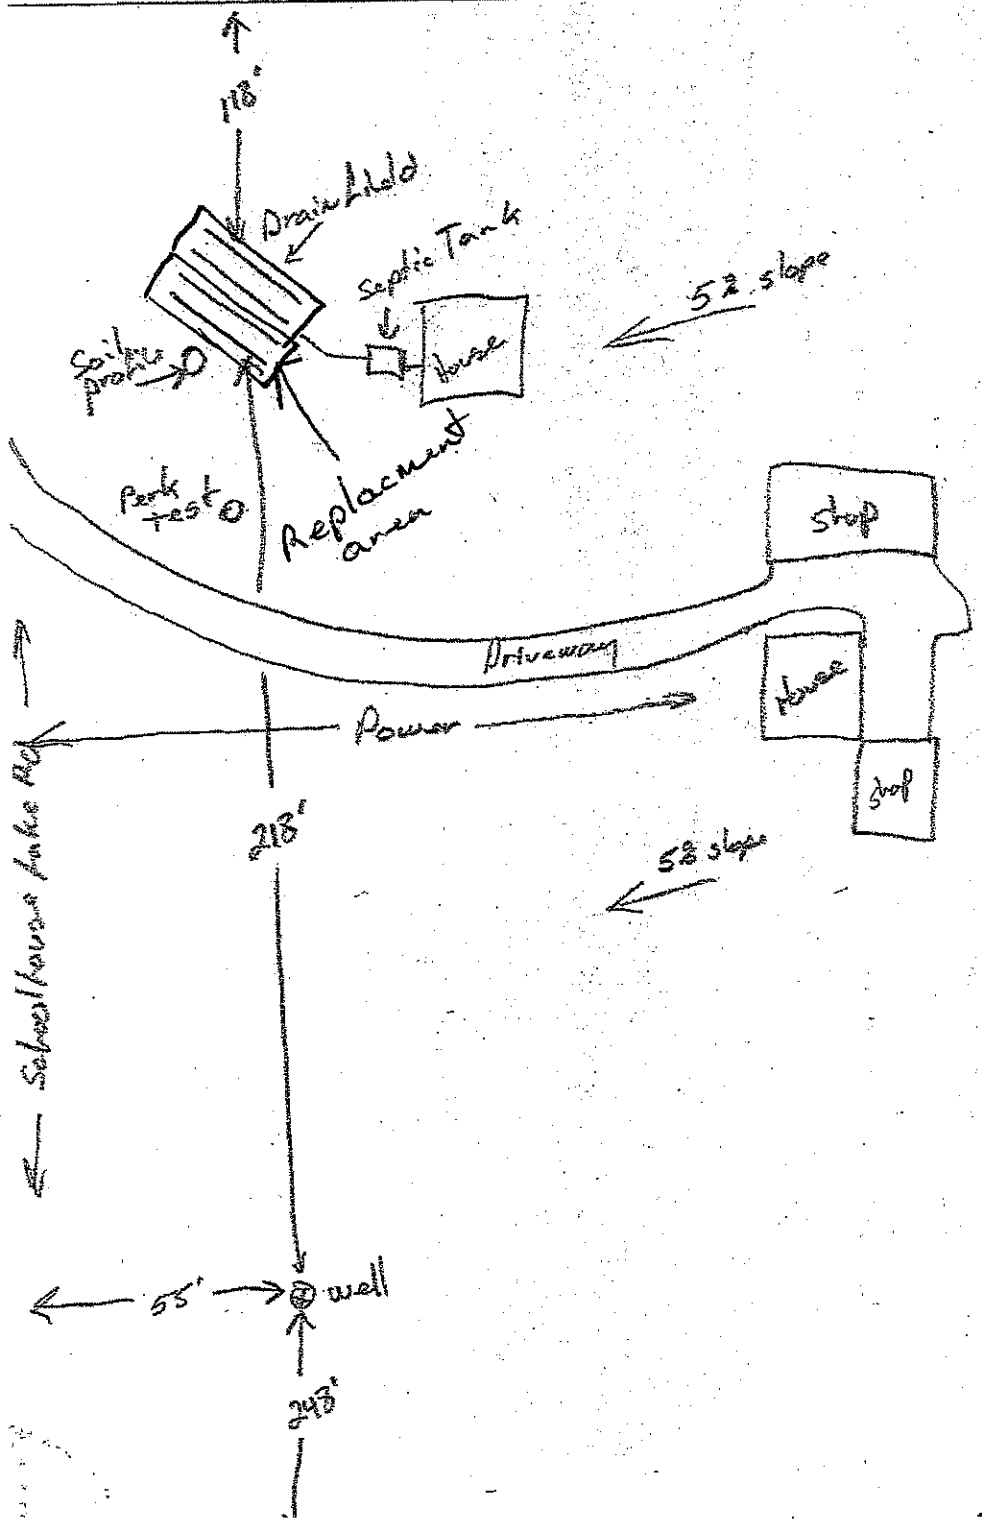
Signed: Logan Munts *Date:* 4/4/23

____ Lincoln County Health Department (LCHD) _X_ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

20 Acres


N
110'
Drainfield
Septic Tank
5% slope
House
Soil Probe
Perk test
Replacement area
Shop
Driveway
House
Power
Shop
218'
5% slope
Schaal/Kenyon Parker Rd
55'
well
243'