LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 06/17/2022 Expiration Date: 06/16/2023

Property Owner: Matthew Hostetler c/o: Enviro-Tech Consulting

Address: [redacted]

Telephone: 406-257-2795

Installer: ~~TBD~~ Ivan Miller License No. 52

Proposed Work: (Check One) ☒ New Installation ☐ Existing System

☐ Repair ☐ Replacement ☐ Extension ☐ Other _____

Describe: Install four 78' laterals, gravity system

Parcel Description:

Legal: S27 T37N R28W

Address or Location: 316 W Dodge Creek Rd, Rexford Assessment Code: 5599

Approved Design Criteria:

Bedrooms: 2 Septic Tank Size: 1000 gallons Drainfield Size: 312 lineal feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Kathi J. Hooper, R.S.

Closure Statement:

I, Ivan Miller, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: Ivan Miller *Date:* 8/29/22

Title: installer

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER


This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

5

Legend

- test hole
- proposed drainfield site
- proposed replacement area
- existing well site w/ 100' isolation zone
- mixing zone
- proposed septic tank

Name: Hostetler
County: Lincoln
Location: SWNW¼
sec.27-T37N-R28W
E.Q.#

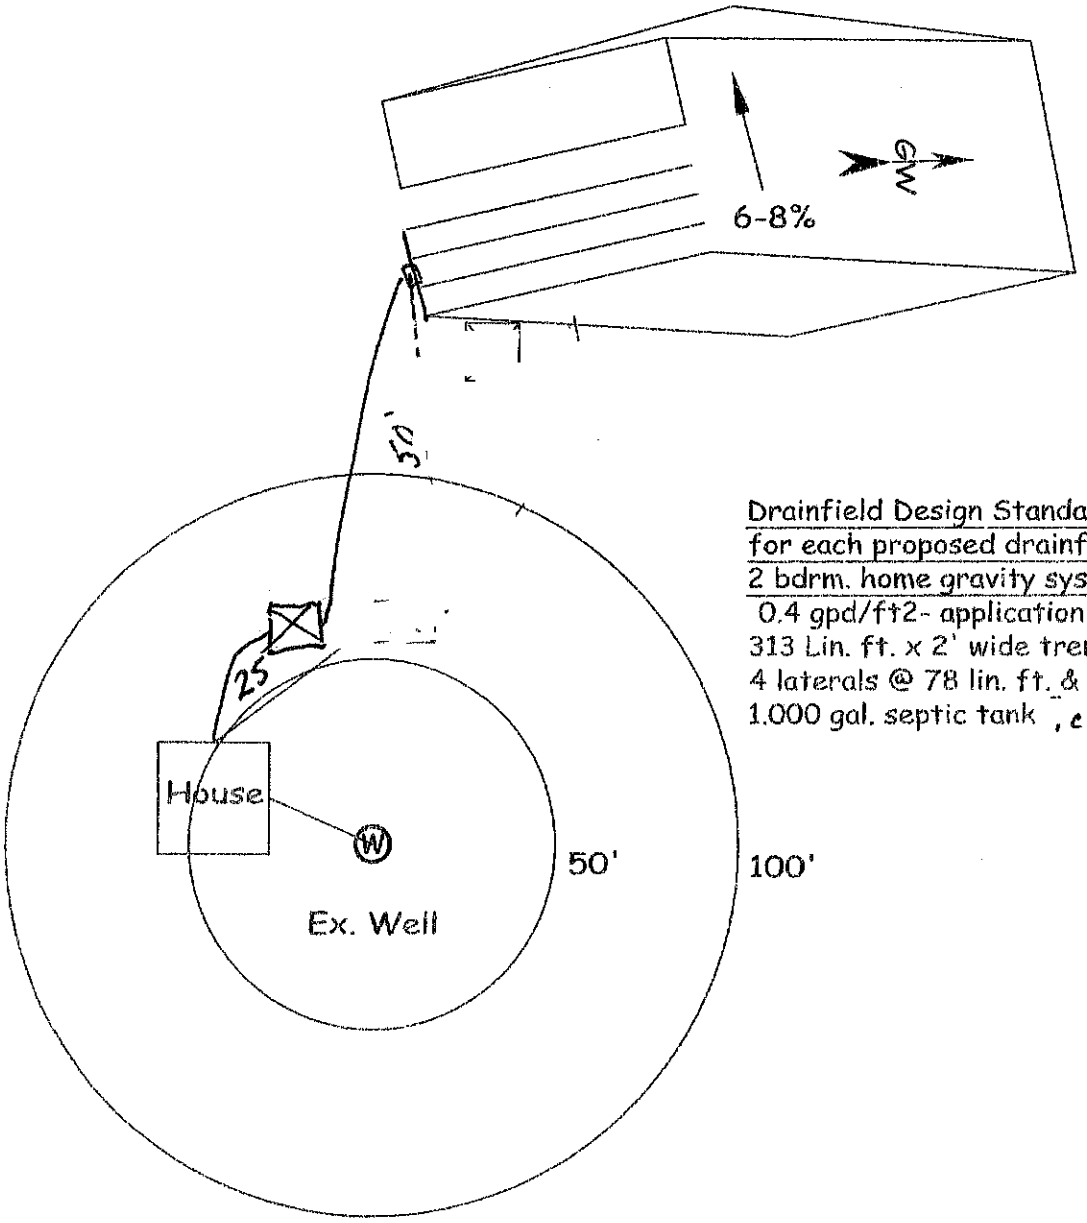

Drainfield Design Standards
for each proposed drainfield
2 bdrm. home gravity system
0.4 gpd/ft2- application rate
313 Lin. ft. x 2' wide trenches=
4 laterals @ 78 lin. ft. & 7 ft. on center
1,000 gal. septic tank, concrete

N

1" = 50'

Enviro-Tech
Consulting Inc.
Brian S. Launius
PO Box 5674
Kalispell, MT 59903
(406)257-2795

Tax Id #5599