LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Permit #24-55511

Issue Date: 11/15/2024 Expiration Date: 11/14/2025

Property Owner: Mark and Cheryl McMillan

Mailing Address: [redacted]

Installer: Donavan Truman License #: 109

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system for 3 Bedroom House.

Parcel Description:

Legal: S27, T37 N, R28 W, COS 3772, PARCEL E IN NESE, ACRES 2.49

Property Address: 36 Trapper Ln., Rexford, MT 59930 Assessment Code: 55511

DEQ COSA: EQ#09-1413/09-1412 Date: 01/08/2009

Approved Design Criteria: Installation of new pressure dosed system for 3 Bedroom House with 2 Laterals @ 125'. Drainfield location must be marked before installation to verify location within the drainfield easement of Parcel B. Drainfield location must be permanently marked before backfill.

# of Bedrooms: 3 Septic Tank Size: 1000/500 gallons Trench Width: 36"

# of Laterals: 2 Length of Laterals: 125' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, R.S.*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 5/29/25

__✓__ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

PLANS AND SPECIFICATIONS FOR DRAIN[illegible]FIELD(S) INSTALLATION

1) All drainfield trenches and replacement trenches shall be evenly spaced and situated. Elevation of each lateral shall be determined by use of a surveyor's level.

2) All drainfields shall be installed in the exact drainfield area initially (primary use) The replacement for each drainfield will be made (auxiliary drainfield area) The movement for the replacement area shall continue north between the existing (initial) mounds to the replacement area.

3) All drainfields shall be installed on each lot provided in the uppermost end of the southern drainfield area. As each drainfield is permitted, the system shall be installed in the most upslope area that the existing system. Therefore, all systems shall be installed in an east to west direction.

4) Existing systems must be carefully located and labeled upon backfilling.


5) The existing drainfield may be joined or driven over during installation for any need of new systems to prevent damage.

6) Each forcemain shall be permanently labeled and each stopped at the NE end of southern drainfield area.

Reviewed by the Local Reviewing Agency
Under contract with the
Department of Environmental Quality/PCD
Local Reviewer — Date

Accepted under contract
Barbara Kinney — 1/20/09
DEQ Representative — Date
EQ # 09-1413

DRAINFIELD(S) / FORCEMAIN LAYOUT

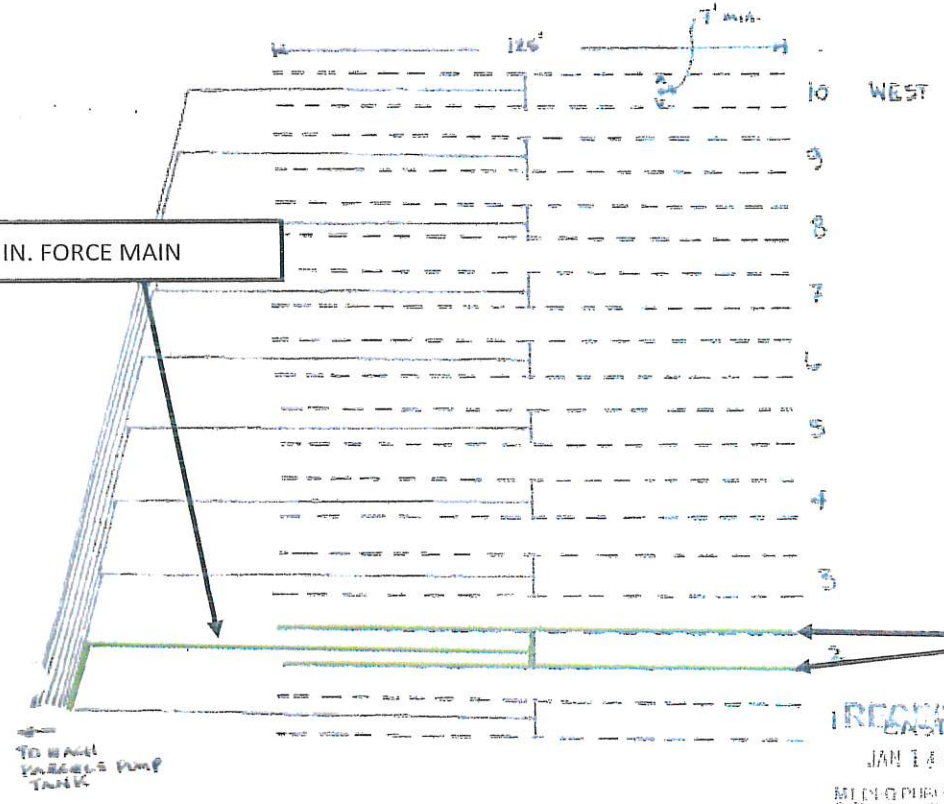

SCH 40 2 IN. FORCE MAIN

(TWO) 1.5 IN. 125 FT LATERALS
ON 7 FT CENTERS
1/8 IN HOLES—5 FT SPACING

RECEIVED
JAN 14 20[illegible]
MILTON-FREEWATER
& RURAL WATER DISTRICT