

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner NW Cor. of Sec. 31 T. 26 N., R. 29 W., P.M.M. LINCOLN County


1908 G.L.O. Original Record by Howard B. Grant: Set a fir post, 3 ft. long, 4 ins. sq., 24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, marked with 1 notch on the S. and 5 notches on the N. edge; from which I establish four bearing trees. Note: No available bearing tree in sec. 36.

1916 Resurvey by S.F. Walters: The old cor. established for secs. 25, 30, 31 and 36, which is a pine post, marked as described by the Surveyor General. The old bearing trees have been destroyed by fire. I therefore raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. Hereafter this cor. will refer to secs. 30 and 31 only.

1968 B.L.M. Remonumentation: The cor. of secs. 30 and 31, on the W. bdy. of the Tp., as determined from the remains of the original bearing trees.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins in the ground, with brass cap mkd.



from which

The original bearing trees:

- A rotten stump, bears N.79° W., 67 lks. dist., (44.2 ft.) with no visible marks. (Record)
- A fir, 18 ins. diam., bears N.19° W., 55 lks. dist., (36.3 ft.) mkd. T26N R30W S25 BT. (Record)


The new bearing trees:

- A larch, 6 ins. diam., bears N.59° E., 58 lks. dist., (38.3 ft.) mkd. T26N R29W S30 BT.
- A larch, 5 ins. diam., bears S.10 1/2° E., 40 lks. dist., (26.4 ft.) mkd. T26N R29W S31 BT.

II. Found a 3 1/2 ins. diam. B.L.M. brass cap, protruding 6 ins. out of the ground, mkd. as shown above, from which

- A larch snag, 5 ins. diam., bears N.51° E., 5.1 ft. dist., visible scribing 26 R29 S31. (not of record)
- A larch, 9 ins. diam., bears N.58° E., 38.4 ft. dist., visible scribe 6N R29W S3
- A larch, 9 ins. diam., bears S.10° E., 27.0 ft. dist., scribe overgrown.

III. Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs. Set a galvanized steel guard post with Land Survey Marker and Property Boundary decals, South 3 ft. Magnetic Declination 20° E.

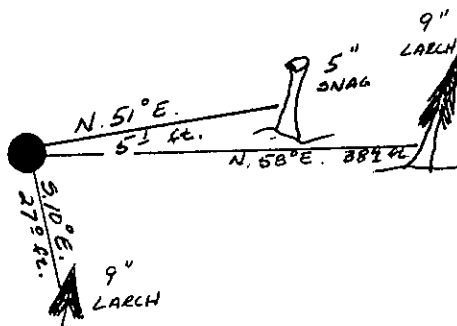

SKETCH OF CORNER

CERTIFICATION
Gary C. Crismon

I, _____
certify the information shown herein is true and correct.

Gary C. Crismon
Signature Ground Party Chief
Alvah F. Hughes

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal
01/07/91 7322 S

Date: _____ Reg. No. _____
U.S. FOREST SERVICE
Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 1-10-91 was noted on the cross-index plat and is assigned page No. 4505, in book No. _____

Coral M. Cummings by Dixie Buckoff
County Official

V 1 26 N 29 W
Cross Index No. _____ T. _____ R. _____ PMM

