LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 7/12/2022 Expiration Date: 7/11/2023

Property Owner: Brandon Oberkamp

Mailing Address: [redacted]

Telephone: [redacted] Email: [redacted]

Installer: Bradley S. Persson License #: 159

Proposed Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Install 3' trenches, pressure dosed.

Parcel Description:

Legal: S14 T36N R28W, 19.998 acres

Property Address: 875 Skyview Dr, Rexford Assessment Code: 12636

Approved Design Criteria:

# of Bedrooms: 5 Septic Tank Size: 1500/500 gallons Drainfield Size: 440 square feet

# of Laterals: 5 Length of Laterals: 88 lineal feet Trench Depth: 24-36 inches

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Pressure-dosed system. ANY CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Kathi J. Hooper, R.S.

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: _____ *Date:* 8-9-22

X Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

#12636

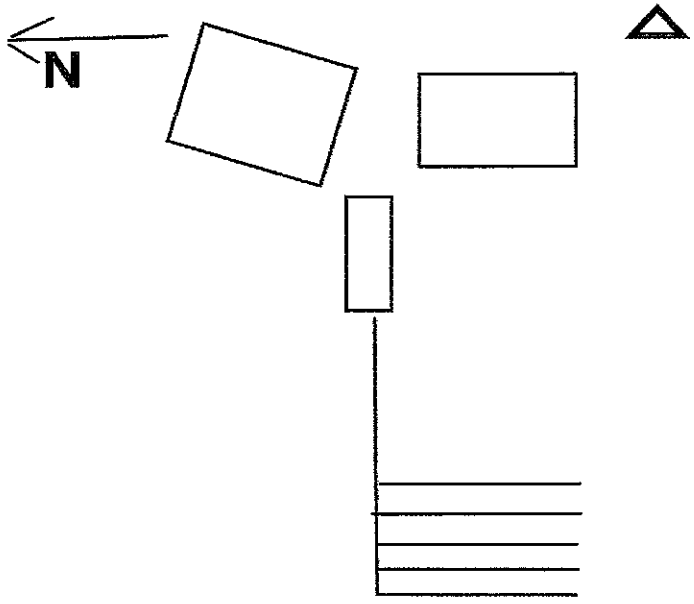

Well 63' from East Poperty Line, 36' from SE corner of Garage
Tank 1000/500 gravity siphon with 4" sch 40 lines, breather line returning to tank in first 6'
35'6" from garage CO to tank baffle
43'9" from garage CO to siphon
28" from House CO to tank baffle
34' 8" from House CO to Siphon
129' from Siphon to midpoint cleanout
240" from Siphon to drainfielld (roughly 60' of drop)
(5) 88' runs 1 1/4" field 3/16" holes on 5' center - lines 9' aprt due to rocky soil.

SKYVIEW DR