


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner NW corner Sec. 24 T. 26N R. 30W P.M.M. Lincoln County

1. 80 chains: Set a shale stone, 14 X 12 X 5 ins. 9 ins. in the ground, for Corner of Sections 13,14,23,24, marked with 3 notches on the south and one notch on the East edge from which a Tamarack, 6 ins. diameter, bears N 83°E 406 links distance marked T 26N.,R.30W S 13 B.T. A Tamarack 30ins. diameter, bears S 85 E 46 links distance, marked T 26N.,R.30W S 24 B.T. A Tamarack, 20ins. diameter, bears S 1 W 5 links distance, marked T 26N.,R.30W. S 23 B.T. a Pine 3 ins. diameter, bears N 39°W., 117 links distance, marked T 26N.,R.30W S 14 B.T.
2. Found: Original stone with 3 notches on the South and one on the East.
3. I replace the stone with a 3" aluminum monument on a 30" pipe, from which an 8" Pine bears N 43°W 23.2 ft. scribed S 14 B.T. (posted and painted). A 12" Pine bears N 21°E 11.6 ft. scribed S 13 B.T. (posted and painted). A 12" Larch bears S 29°E 7.6 ft. scribed S 24 B.T. (posted and painted). A 12" Pine bears S 89°W 6.7 ft. N 8°E 12.1 ft. with location poster attached. Set attention poster (54-4) on the 12" Larch B.T. which bears S 29°E 7.6 ft.



Set a 3" aluminum monument marked as shown.

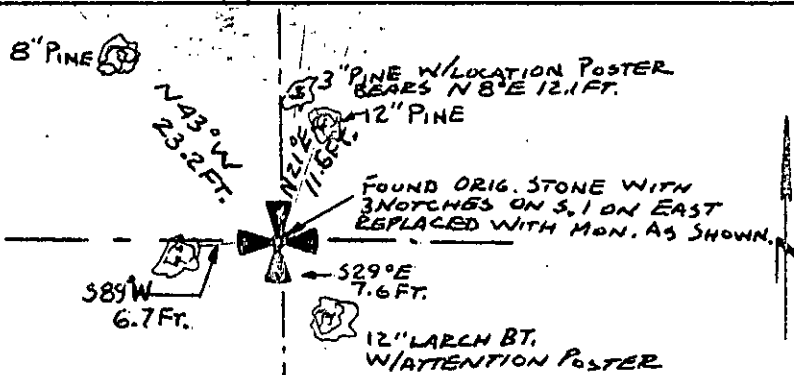

SKETCH OF CORNER

CERTIFICATION

I, \_\_\_\_\_ certify the information shown herein is true and correct.

Signature Ground Party Chief

Jack H. Ninneman

I, \_\_\_\_\_ certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.).

*Jack H. Ninneman*  
Signature of Surveyor & Seal

Date: 10/81 Reg. No. 4661S

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the November 8th day of 1981 was noted on the cross-index plat and is assigned page No. 1352, in book No. 1

*Cleanor L. Vaughn by Betty L. Conces*  
County Official Deputy

Sec.			

Cross Index No. N-21 T. 26N R. 30W P.M.M.

• - corner this sheet