

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner NE Corner Sec. 24 T. 26N R. 30W P.M.M. Lincoln County


1. Set an iron post, 3 ft. long 3 ins. in diam. 24 ins. in the ground, for Corner of Sections 13 and 24 with brass cap marked

T26N
S 13
S 24
R30W
1916


Raise a mound of stone, 2 ft. Base, 1½ ft. high west of corner.

2. Found 1916 brass cap (as shown below) with a mound of stone northwest of corner.

3. I set location posters on a 14" Pine which bears N 30°E 8.8 ft. from monument and a 14" Larch which bears S 10°E 28.2 ft. Painted stone mound, monument and both trees with bright red paint.



Found 1916 brass cap marked as shown.

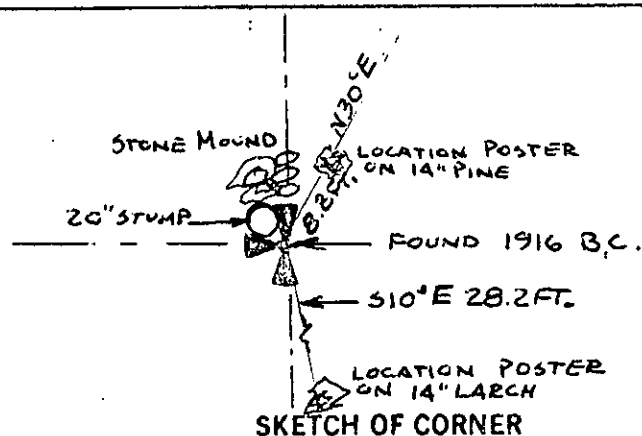

SKETCH OF CORNER

CERTIFICATION

Jack H. Ninneman

I, Jack H. Ninneman, certify the information shown herein is true and correct.

Jack H. Ninneman
Signature Ground Party Chief

Jack H. Ninneman

I, Jack H. Ninneman, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman
Signature of Surveyor & Seal

9/81

Reg. No. 4661S


Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the November 5th day of 1981, was noted on the cross-index plat and is assigned page No. 1353, in book No. 1

Eleanor L. Vaughn by Betty L. Conner
County Official Deputy

Cross Index No. N-25 T. 26N R. 30W P.M.M.

Sec. 24



• corner this sheet