INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ites, position of accessories, etc.


 5. Certification must be signed and scaled by Registered Land Surveyor in State of Montana.

 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

| Corner | NW | Corner | Section | 34 | Τ. | 26N | R. | 30W . | P.M.M. | Lincoln | County |
|--------|----|--------|---------|----|----|-----|----|-------|--------|---------|--------|
| | | | | | | | | | | | |

- 1. 80 chains: Set shale stone 18X15X5 ins. 12ins., in the ground for corner Section 27,28,33 & 34 marked with 1 notch on the S. and 3 notches on the E edge; and raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high west of corner.
 - 2. Found original stone with one notch on the south and three notches on the east. Mound of stone as described.
 - 3. I replace stone with a 3" aluminum monument on a 30" pipe from which a six inchapine bears N 65°W 10.1 feet scribed S 28 B.T. and posted. An eight inch Pine bears N 21°E 10 feet scribed S 27 B.T. and posted with B.T. sign and attention poster (54-4). A 12" Fir bears S 38°E 13.4 feet scribed s 34 B.T. and posted. With B.T. sign and location poster (by others). A 12" Pine bears west 5.2 feet scribed S 33 B.T. and posted. Placed mound of stone around monument and buried original stone in mound. Painted all accessories bright red.

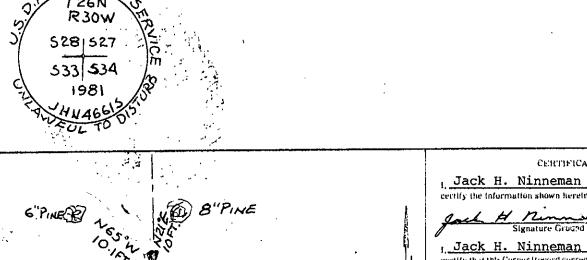

FORES

CERTIFICATION rtify the information shown herein is true and correct. ture Ground Party Chief certify that this Corner Record correctly represents work performed by the or under by direction in compliance with the "Corner Recordation Act" (70-22-10), of seq., M.D.A.) TZ"PINEQ H. Rimanum Signature of Surveyor & Seat 5.2FT. 10/16/8 keg No. 4661S
Ninneman Engineering Inc. SKETCH OF CORNER Employer: Office of Clerk and Recorder, County of Lencole This "corner record" was filed for record on the Movember day of 1984 was noted on the cross-index plat and is assigned page No. 135 L. Vaughw be County Official book No. corner this sheet